


## Connecteur à broches Pogo à contact double tête

Spécification:

Marque	SFENGSONDE
Numéro d'article	<b>Épingle pogo double tête</b> SF-0,45*25,8-BT
Matériel	Plongeur : Becu / Au sur Plaqué Ni Plongeur : SK4 / Au sur Plaqué Ni Canon : PhBz / Au sur Plaqué Ni Printemps : SWP
Note actuelle	0,5A
Résistance des contacts	$\leq 100 \text{ m}\Omega$
Course complète	6,8 mm
Course nominale	4,5 mm
Force du ressort	$75 \pm 20 \%$
Temps d'un cycle	100 000 fois
MOQ	100PCS si nous avons stock
Délai de mise en œuvre	2-15 jours après réception du paiement

Image Montrer:

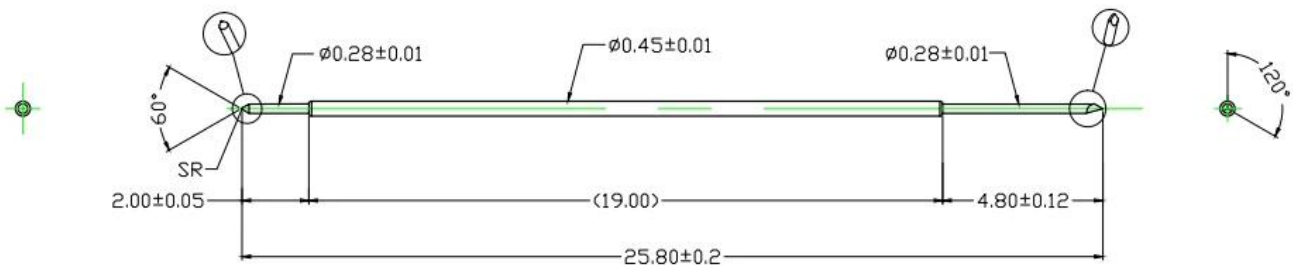

Nos avantages:

1. we have 30 years experience in probe pin and have ourself factory.
2. we provide free sample and have a testing department.
3. we could manufacture products as your request.
4. we guarantee best price and good service.

Notre Principal Produit :

Spring loaded pin (single) for PCB, ICT, FCT testing etc;

Pogo pin (connector) to establish connection between two printed circuit boards for charging, locating, Battery, Semiconductor & Interconnect applications;

Double ended probe for BGA and Semiconductor testing;







Universal pin without spring, coating pin, LM pin with QZ and VZ series;

High current probe, Switch probe, Capacitance needle;

Terminal & receptacle /socket;

Other related electronic components, 30# OK wire, Jig locks, POM, Iron hinge etc

Test de l'Équipement:

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

Emballer:

