
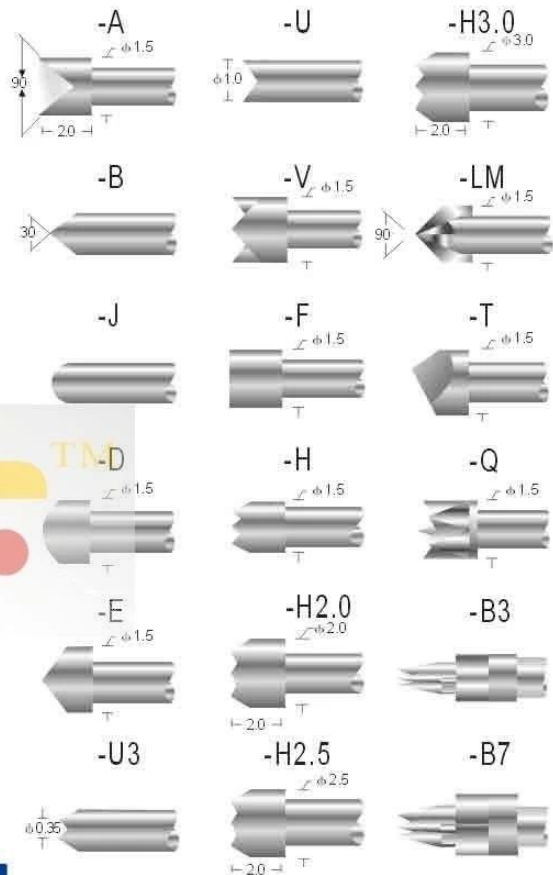


□□□□

□□	□□
□□□□	SF-PA100-H
□□	□□
□	□□
□□	SUS □□□□
□□□	200□
□□□	6.40(0.2520"")
□□□□	3A
□□□□	W
□□	2.54(0.1000"")
□□□□□	1.70(0.0670"")/1.75(0.0689"")
□□□□□	100□
□□□□	□□□□□7□□□□

□□□□

SF-P100

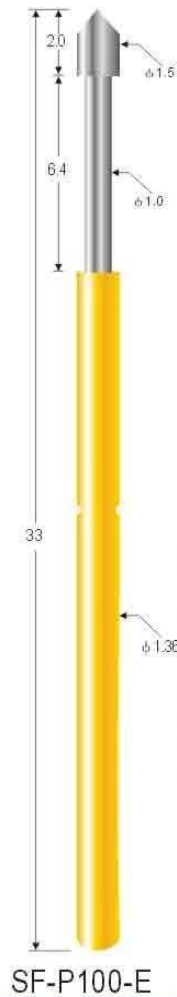

Probe specifications SF-P100(技术规格)

- Recommended minimum center(最小间距): 2.54mm(.1000")
- Mounting hole size(钻孔尺寸):
压克力: 1.70mm(.0670")
电木板、玻璃纤维板: 1.75mm(.0689")
- Full travel(行程): 6.40(.2520")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰):
Plunger: Be Cu, Rh plated; SK4, Rh plated
Barrel: Brass, Gold plated
Spring: Stainless steel
- Current ration(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)

www.shengfengdz.com

□□□□

✘

□□□□□

1. 24
2. OEM
- 3.
- 4.

PCB ICT FCT

Pogo pin







BGA

QZ VZ LM

/

30#OK POM

##

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

□□□□

