


## 技术规格 PROBE SPECIFICATIONS

Recommended minimum center 最小间距	4.75mm(.1870 ")
Mounting hole size 钻孔尺寸	压克力: 2.75mm(.1083 ") 电木板、玻璃纤维板: 2.80mm(.1102 ")
Full travel 行程	6.30(.2480 ")
Spring force 弹簧压力	250g(克)
Materials and finishes 材料及涂饰	Plunger:SK4, Ni or Au plated BeCu, Ni or Au plated Phosphor bronze, Ni or Au plated Barrel:Brass, Au plated Spring:Stainless steel
Current rating 额定电流	5A(安培)
Contact resistance 接触电阻	50mΩ(毫欧姆)
Connections 接线形式	Crimp: R156-VCR,R156-CR Solder cup: R156-VSC, R156-SC

Receptacle specifications  
Materials and finishes: Phosphor bronze,Gold plated

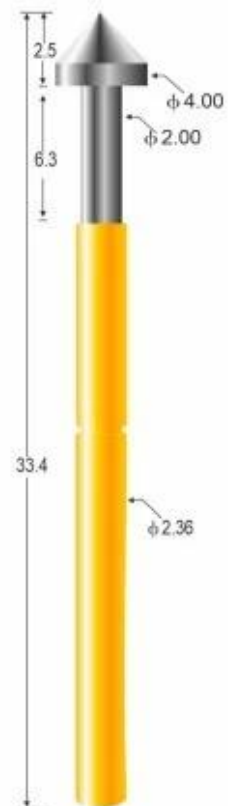

SF-P156-E



1. 24个探针
2. OEM 定制
3. 定制
4. 定制



1. PCB ICT FCT
2. 2
3. BGA
4. QZ VZ LM
- 5.
- 6.
7. 30# OK POM



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products



6. Packing







