


□□□□

□□	□□
□□□□	SF-P100-B
□□	□□
□	□□
□□	SUS □□□□
□□□	200□
□□□	6.40(0.2520"")
□□□□	3A
□□□□	W
□□	2.54(0.1000"")
□□□□□	1.70(0.0670"")/1.75(0.0689"")
□□□□□	100□
□□□□	□□□□□7□□□□

□□□□

# SF-P100

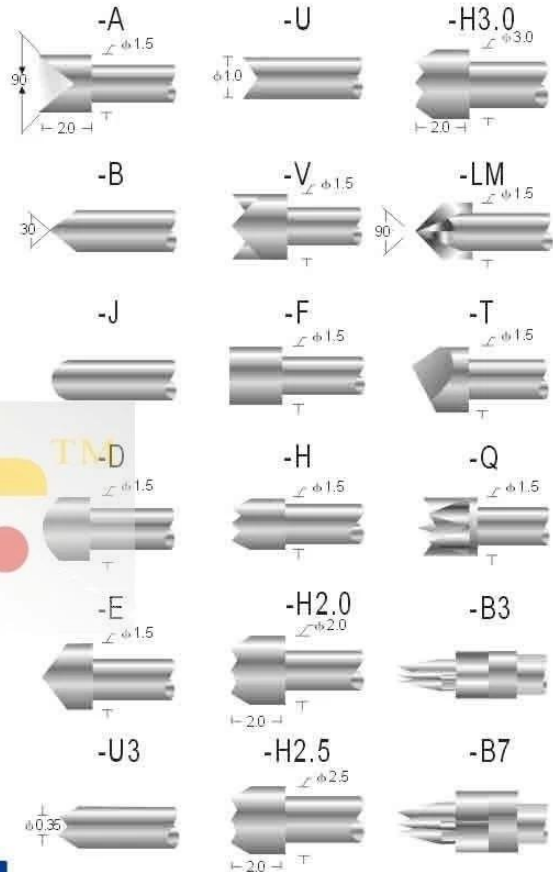

## Probe specifications SF-P100(技术规格)

- Recommended minimum center(最小间距): 2.54mm(.1000")
- Mounting hole size(钻孔尺寸):  
压克力: 1.70mm(.0670")  
电木板、玻璃纤维板: 1.75mm(.0689")
- Full travel(行程): 6.40(.2520")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰):  
Plunger: Be Cu, Rh plated; SK4, Rh plated  
Barrel: Brass, Gold plated  
Spring: Stainless steel
- Current ration(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50m $\Omega$ (毫欧姆)

[www.shengfengdz.com](http://www.shengfengdz.com)



chinapogopinsupplier.com

### 产品系列

1. 24 针
2. OEM
- 3.
- 4.

### 应用

PCB ICT FCT

Pogo pin

BGA







QZ VZ LM

□□□□□□□□□□□□

□□□□/□□□

□□□□□□□□30#OK□□□□□□POM□□□□□

□□□□

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

□□□□

