
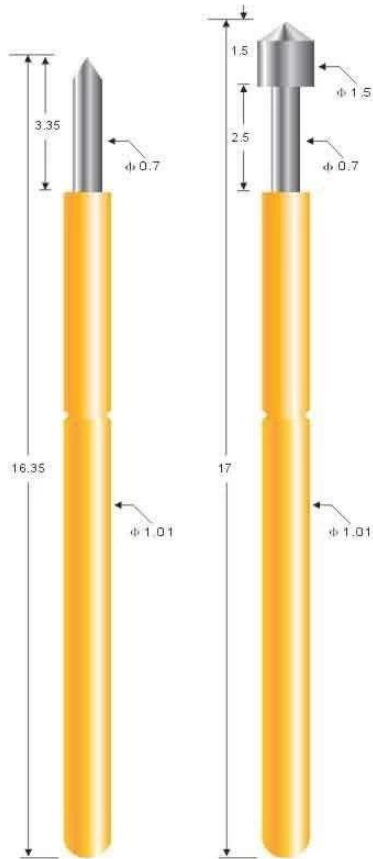


□□□□

□□	SFENG
□□□□	SF-P75
□□	□□
□□	□□
□□	SUS□□□□
□□	120□
□□□□	3.35□0.1319"□/ 2.5□0.0984"□
□□□□□	3A
□□	50□W <sup>-</sup>
□□□□	1.90□0.0748"□
□□□□□	1.35□0.0532"□/ 1.40□0.0551"□
MOQ	100 □
□□□□	□□□□□7□□□

□□□□

# SF-P75

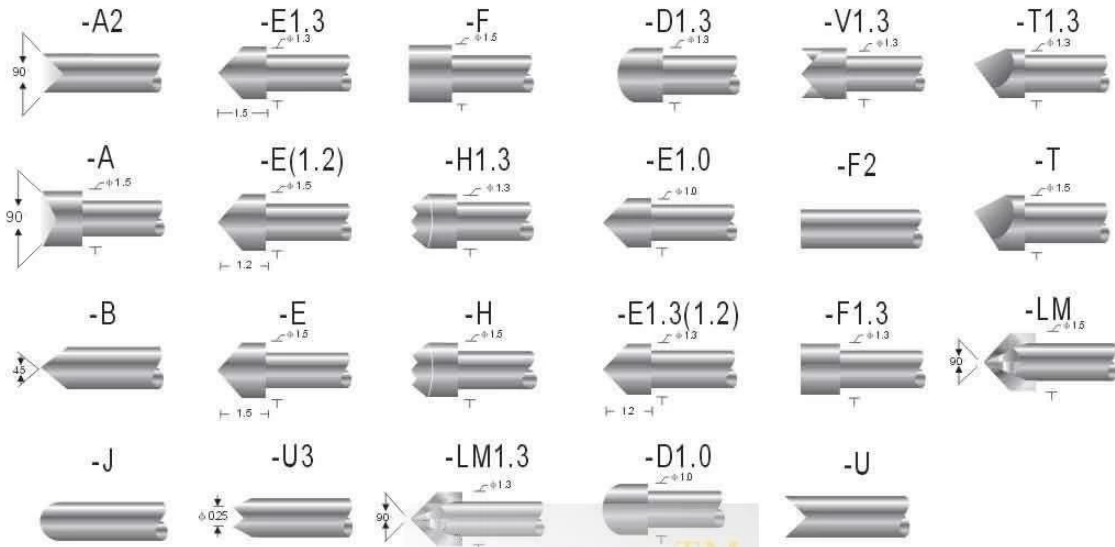

SF-P75-B

SF-P75-E

## Probe specifications SF-P75(技术规格)

- Recommended minimum center(最小间距): 1.90mm(.0748")
- Mounting hole size(钻孔尺寸):  
压克力: 1.35mm(.0532")  
电木板、玻璃纤维板: 1.40mm(.0551")
- Full travel(行程): 3.35(.1319")/2.50(.0984")
- Spring force(弹簧压力): 120g
- Materials and finishes(材料及涂饰):  
Plunger: Be Cu, Rh plated; SK4, Rh plated  
Barrel: Phosphor bronze, Gold plated  
Spring: Stainless steel
- Current ration(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)



chinapogopinsupplier.com

### 优势

1. 24小时服务
2. OEM
- 3.
- 4.

### 应用

PCB ICT FCT;  
; ;  
BGA;







□□□□□□□□□□LM□□QZ□VZ□□;

□□□□□□□□□□□□□□;

□□□□□;□□/□□;

□□□□□□□□□□30□OK□□□□□□□□POM□□□□□□

□□□□

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

□□□□

