


□□ □□

□□	SFENG
□□ □□	SF-P156
□□□	□□
□	□□
□	SUS □□ □□ □□□
□ □□	250g
□□ □□	6.30 (0.2480 ")
□□ □□	5A
□□ □□	50mW
□□	4.75 (0.1870 ")
□□ □□ □□	2.75 (0.1083 ") / 2.80 (0.1102 ")
MOQ	(100) □
□□ □□	7 □ □□□□□ □

□□ □□

SF-R156

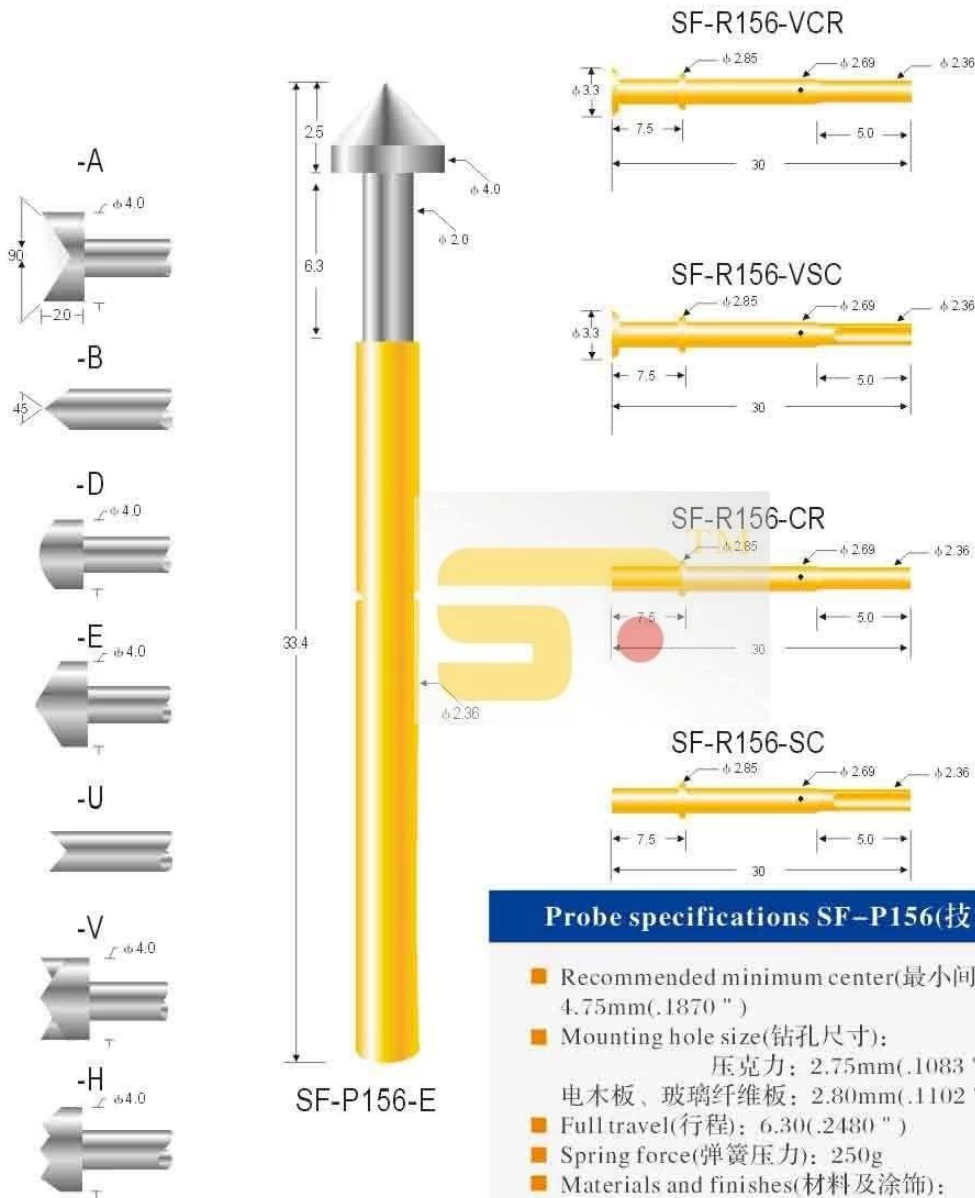

Probe specifications SF-P156(技术规格)

- Recommended minimum center(最小间距): 4.75mm(.1870")
- Mounting hole size(钻孔尺寸):
压克力: 2.75mm(.1083")
电木板、玻璃纤维板: 2.80mm(.1102")
- Full travel(行程): 6.30(.2480")
- Spring force(弹簧压力): 250g
- Materials and finishes(材料及涂饰):
Plunger: Be Cu, Rh plated;
Barrel: Brass, Gold plated
Spring: Stainless steel
- Current rating(额定电流): 5A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)
- Connections(接线形式):
Crimp: R156-VCR, R156-CR
Solder cup: R156-VSC, R156-SC

www.shengfengdz.com



□□ □□

1. □□ □□ □ □ □□□□ 24 □□ □□ □□ □□.

2. 0000 00 00000 0000 0 00000 0 OEM 000000.
3. 0000 00 0 0 00000 00 0000 00000 0000 00000 0000 0.
4. 0000 00 0 0 00000 0000 00000 00 0000 0000 00 00.

00 00

PCB, ICT, FCT 0000 00000 000000 0 (00);

00 0 (0000) 0000 00 00 00 0000 0000 000000, 00 00, 0000, 0000 & A; 00 00 00 0000;

BGA 0 0000 00000000 00 00 0000;

0000 00 0, 00 0, QZ 0 VZ 0000 LM 0;

00 00 0000, 0000 0000, 00 00 00;

0000 & A; 00 / 00;

00 00 00 00, 30 # 00 0000, 00 00 00, POM, 0 00 0

00 00

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

□ □ □ □

