
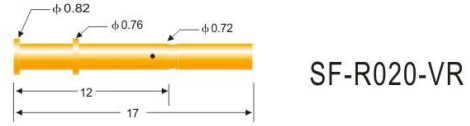



□□□□

□	SFENG
Item□	SF-P020
□□	□□
□□□□	□□□□□7□□□□


SF-P020

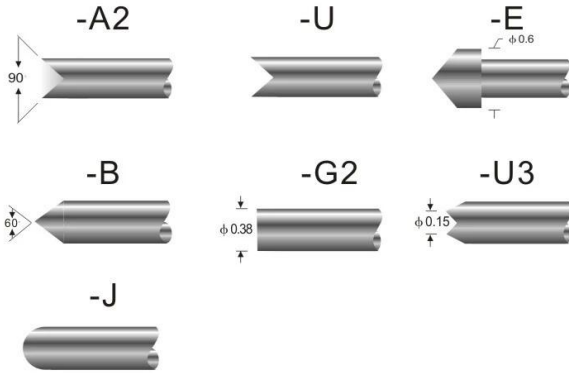


SF-R020-VR

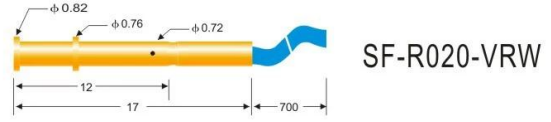


SF-R020-VRW

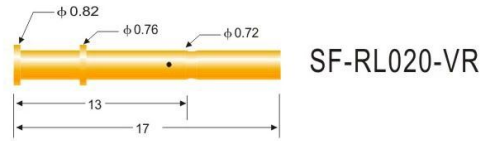

SF-RL020-VR

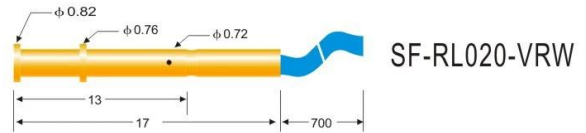

SF-RL020-VRW

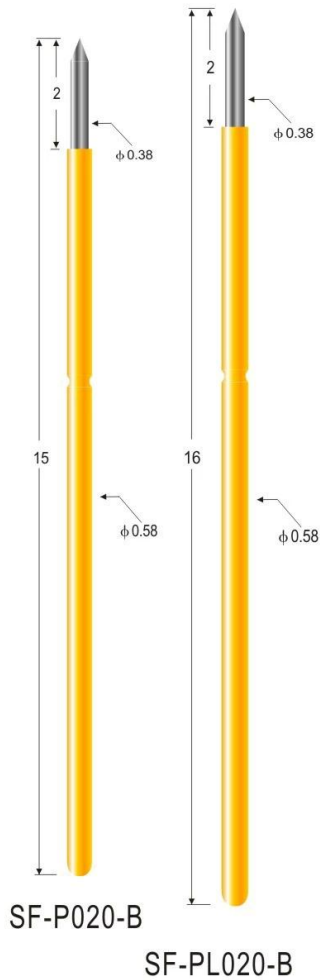

SF-P020-B

SF-PL020-B

Probe specifications SF-P020 PL020 (技术规格)

- Recommended minimum center(最小间距): 1.0mm(.0394 ")
- Mounting hole size(钻孔尺寸): 0.75mm(.0295 ")
- Full travel(行程): 2.0(.0787 ")
- Spring force(弹簧压力): 80g(克)
- Materials and finishes(材料及涂饰):
Plunger:SK4,Rh plated
Barrel:Phosphor bronze,Gold plated
Spring:Music wire,Gold plated
- Current ration(额定电流): 1A(安培)
- Contact resistance(接触电阻): 120mΩ(毫欧姆)

Receptacle specifications

Materials and finishes: Phosphor bronze, Gold plated



SF-P020-J

SFENG
The China's The World's

RoHS

QUALITY ASSURED FIRM
ISO 9001
SGS

CE

WWW.SF-PROBE.COM

SF-P020-B

SFENG
The China's The World's



www.chinapogopinsupplier.com

□□□□

□□□□□□ □□□24□□□□

2.□□ □□□OEM□□□

□□□□□ □□□□□□□□□□□□□□□□□□□

□□□□□ □□□□□□□□□□□□□□□□

□□□□

□□□□□□□□□□PCB□ICT□FCT□□□□;

Pogo test & test;

BGA test;




LM, QZ, VZ test;

test;

& test;

30 OK POM test

test

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
