

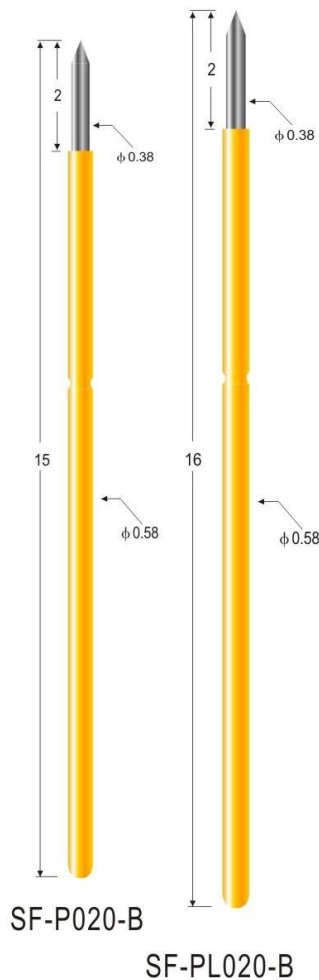



□□□□

□	SFENG
Item□	SF-P020
□□	□□
□□□□	□□□□□7□□□□


SF-P020

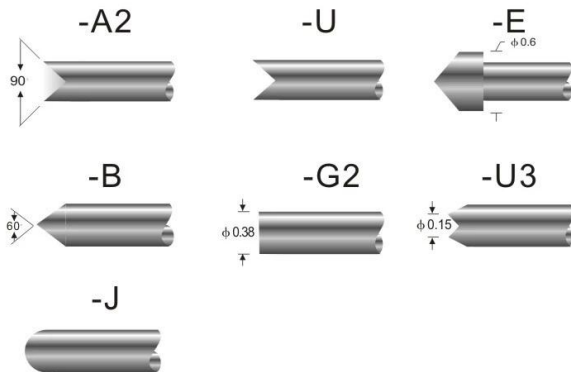


SF-R020-VR



SF-R020-VRW



SF-RL020-VR

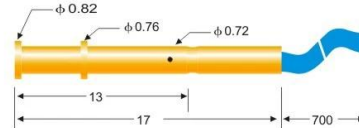

SF-RL020-VRW

Probe specifications SF-P020 PL020 (技术规格)

- Recommended minimum center(最小间距): 1.0mm(.0394 ")
- Mounting hole size(钻孔尺寸): 0.75mm(.0295 ")
- Full travel(行程): 2.0(.0787 ")
- Spring force(弹簧压力): 80g(克)
- Materials and finishes(材料及涂饰):
Plunger:SK4,Rh plated
Barrel:Phosphor bronze,Gold plated
Spring:Music wire,Gold plated
- Current ration(额定电流): 1A(安培)
- Contact resistance(接触电阻): 120mΩ(毫欧姆)

Receptacle specifications

Materials and finishes: Phosphor bronze,
Gold plated

SF-P020-J



SF-P020-B

SFENG
The China's The World's



www.chinapogopinsupplier.com

00000

000000 000240000

2.00 000OEM000

000000 000000000000000000000000

000000 0000000000000000000000

0000

00000000PCB0ICT0FCT000;

