



SFENG 1984 ICT






型號	<b>SF-P125</b>
尺寸	1.90mm x 0.748"
重量	厚度: 1.35mm x 0.0532" 重量: 1.40mm x 0.0551"
電壓	6.30V, 2481"
電流	120"
材料	Be Cu, Rh 鍍層 鍍層
溫度	3A
壽命	50"
精度	100"
其他	7"



# 技术规格 PROBE SPECIFICATIONS

Recommended minimum center 最小间距	3.17mm(.1248 ")
Mounting hole size 钻孔尺寸	压克力: 2.45mm(.0532 ") 电木板、玻璃纤维板: 1.40mm(.0551 ")
Full travel 行程	6.3(.2481 ")
Spring force 弹簧压力	120g(克)
Materials and finishes 材料及涂饰	Plunger: SK4, Ni or Au plated BeCu, Ni or Au plated Phosphor bronze, Ni or Au plated Barrel: Brass, Au plated Spring: Stainless steel
Current ration 额定电流	3A(安培)
Contact resistance 接触电阻	50mΩ(毫欧姆)

Receptacle specifications  
Materials and finishes: Phosphor bronze, Gold plated

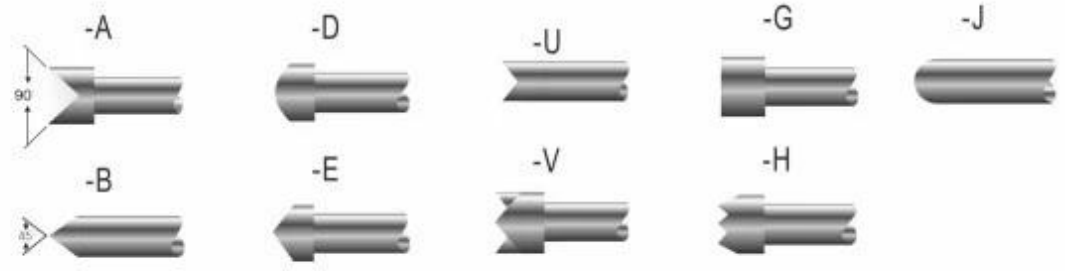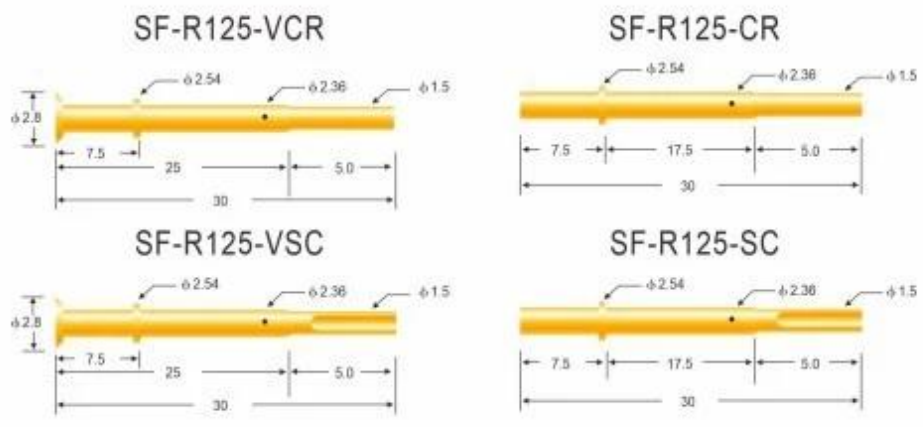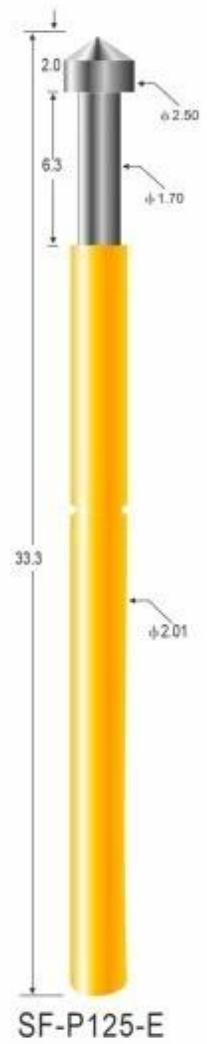

1. 24-pin probe
2. OEM
3. Probe specifications
4. Probe specifications



1. PCB ICT FCT

2. Pogo pin

3. BGA

4. QZ VZ LM

5.

6. /

7. 30# OK POM



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products



6. Packing







A5: [Placeholder]

**Q6.** [Placeholder]

A6: [Placeholder]

**Q7.** [Placeholder] **OEM** [Placeholder] **ODM** [Placeholder]

A7: [Placeholder] OEM/ODM [Placeholder]

**Q8.** [Placeholder]

A8: [Placeholder]