



□□□□□

□	ENG
□□□□	1□□□□□□□□
□□	SF-PA100
□□	□□□□/□
□□	□□□□□
□□	□□□
□□	2N□7.2□□□
□□□	100□

SF-P100

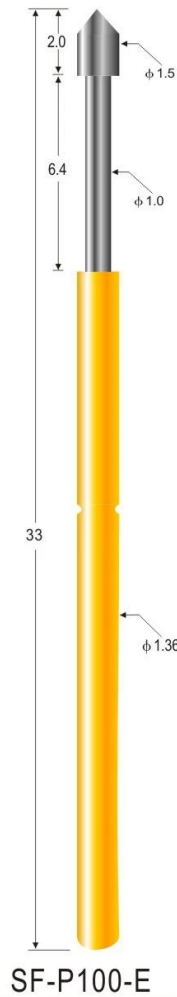


SF-P100-E

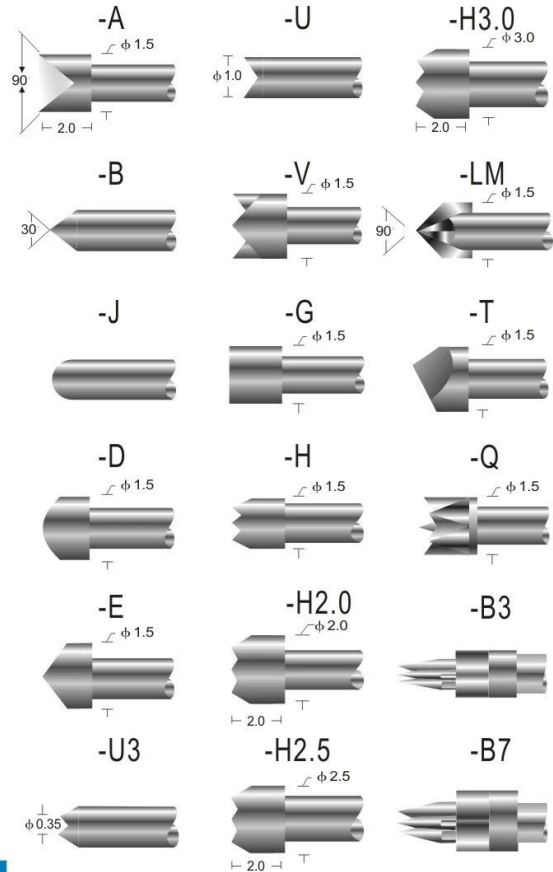

Probe specifications SF-P100(技术规格)

- Recommended minimum center(最小间距): 2.54mm(.1000 ")
- Mounting hole size(钻孔尺寸):
压克力: 1.70mm(.0670 ")
电木板、玻璃纤维板: 1.75mm(.0689 ")
- Full travel(行程): 6.40(.2520 ")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰):
Plunger: Be Cu, Rh plated; SK4, Rh plated
Barrel: Brass, Gold plated
Spring: Stainless steel
- Current ration(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)



SFENG

The China's The World's



SFENG

The China's The World's



SFENG
The China's The World's



30 OK POM

□□□□



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products




6. Packing

□□□□



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter




4. Bond Test



5. Life Fatigue Test



6. Microscope



Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.

