

0000

0	ENG
00	0000SFM265
00	00
00	00
00	000
00	000
0000	5.300
0000	00
0000	00
00	00
0000	00
000	100
0000	00000070

0000








□□□□□□



SF-M265

可选用的针头形式						
材料	针头类型	针头 电镀	特殊版本			
			Φ	Φ (inch)		
AU	A 	Φ 2.5	A	3.0 4.0		
AU	B 	Φ 1.8	N			
AU	H 	Φ 2.3	A	2.5 3.0 4.0		
AU	H1 	Φ 3.5	A			
AU	J1 	Φ 1.0	N			
AU	J 	Φ 1.8	A			
AU	D 	Φ 2.3	N	2.5		
AU	D1 	Φ 3.0	A			
AU	G1 	Φ 1.8	A			
AU	G 	Φ 2.3	A	2.5 3.0 4.0		
AU	V 	Φ 2.3	N	2.5 4.0		
AU	T 	Φ 2.5	N	3.0 4.2		
AU	LM 	Φ 1.8	N	3.0		

安装和功能的尺寸

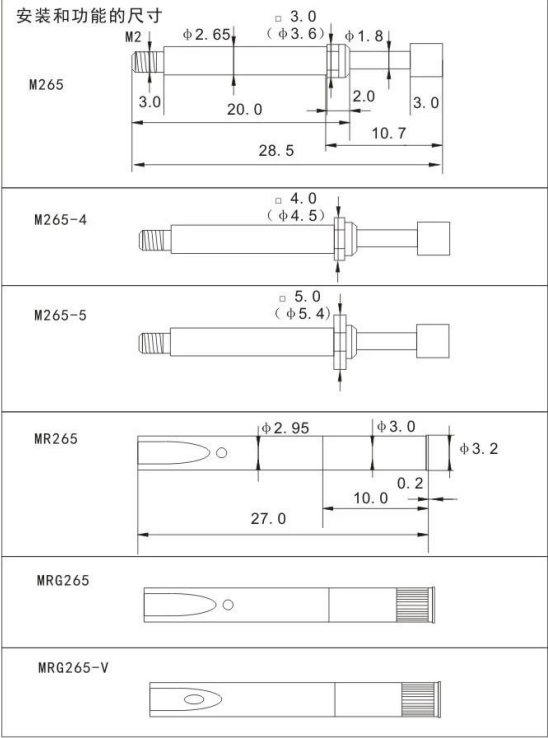

用来测试电缆束的探针
螺钉，螺丝 螺纹设计
可用的螺旋工具

技术参数

间距:	4.00 mm/160 mil
全行程:	5.50 mm
工作行程:	4.40 mm
预装弹力:	0.20/0.20/0.40/0.50/0.80/0.70 N
在工作行程下的弹力:	0.40/0.60/1.50/2.25/3.00/5.00 N

电气数据

电流:	5.0...8.0A
电阻:	≤30 mOhm

材质

针管:	黄铜，镀金
弹簧:	不锈钢
针杆:	铍铜，镀金
套管:	黄铜，镀金

推荐的钻孔直径

HP2361.1 (保温、隔热材料)	3.00 mm
HGW2372 (玻璃棉，玻纤棉)	3.01 mm

2. 物料

3. 物料

4. 物料

物料

PCB、ICT、FCT

物料

BGA

物料、LM、QZ、VZ

物料

物料/

物料30OK、POM

物料



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products




6. Packing


物料



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope



Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.

