

□□□□

□	SFENG
□□□□	SF-P100
□□	□□□□□
□□□□	□□□□□□7□□□□□□

□□□□




SFENG
The China's The World's



szsfeng@126.com alibaba.com

WWW.SF-PROBE.COM

SF-P100

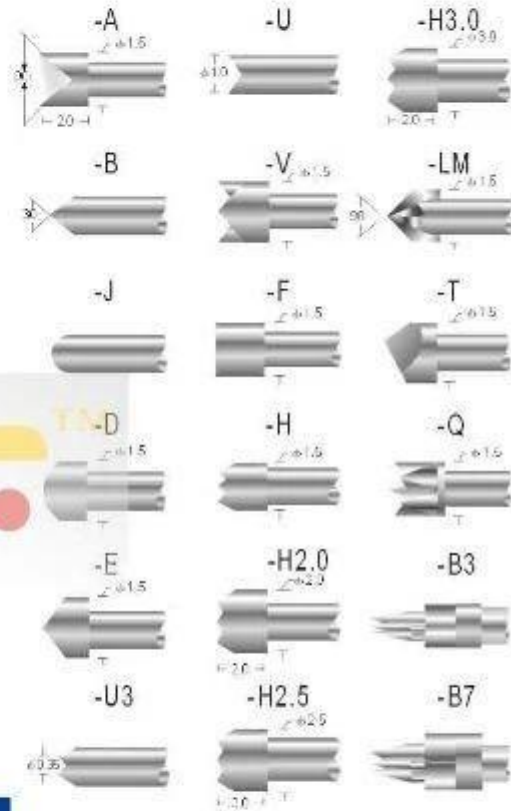

Probe specifications SF-P100(技术规格)

- Recommended minimum center (最小间距): 2.54mm(.1000")
- Mounting hole size (钻孔尺寸):
压克力: 1.70mm(.0670")
电木板、玻璃纤维板: 1.75mm(.0689")
- Full travel (行程): 6.40(.2520")
- Spring force (弹簧压力): 200g
- Materials and finishes (材料及涂饰):
Plunger: Be Cu, Rh plated; SK4, Rh plated
Barrel: Brass, Gold plated
Spring: Stainless steel
- Current rating (额定电流): 3A (安培)
- Contact resistance (接触电阻): 50mΩ (毫欧级)

www.shengfengdz.com

□□□□

1. □□□□□□□□ 24□□□□□□□□

2. □□ □□□□ OEM□□□□

3. □□□□□□ □□□□□□□□□□□□□□□□□□

4. □□□□□□ □□□□□□□□□□□□□□□□□□

