



### 3A ITC E-Cigarette

□□

□□□□	3A ITC E-Cigarette□□□□□
□□	□□□□□SF-PPA2.0 * 4.4MM
□□□□	□□□ □□□□
□□□	□□□ □□□□
Spirng□□	□□□304
□□□□□	3A Max
□□	150□±20□□
□□□□	24V
□□□	□□10000□
□	□□□□□□□□□□
□□□□	□□□□□2-12□□

**SFENG**  
The China's The World's

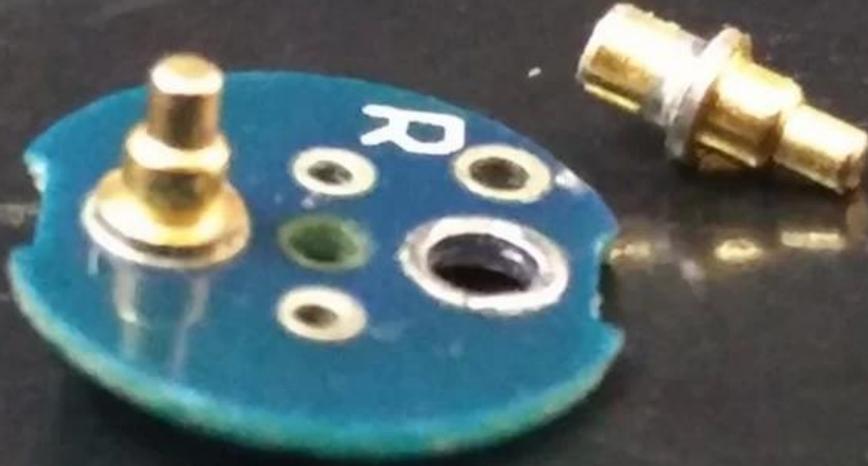

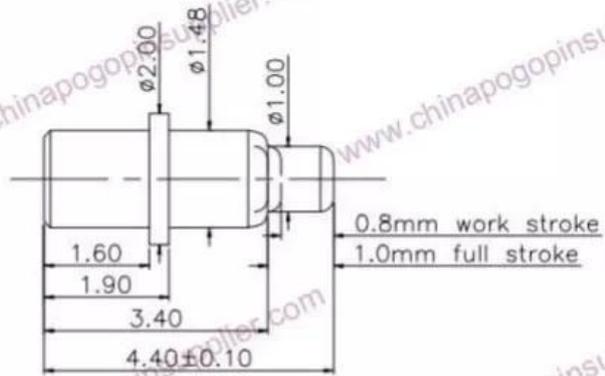

**NOTE:**

**1. Material**

Plunger: Brass C3604

Barrel: Brass C3604

Spring: SUS 304

**2. Plating**

10micro inch minimum Au over 60-100micro inch nickel

**3. Electrical**

Rated current & voltage: 24V 2A (PEAK 3A)

Contact resistance: 100mohm maximum at working height (quiescence)

**4. Mechanical**

Single pin spring force:  $150 \pm 20\%$ g at normal working height

Durability: 10000 cycles minimum

5. To ensure the best usage, please operate it based on the working height

6. RoHS and HF compliant product



**SFENG** 有限公司

本公司通过ISO9001-2008质量管理体系认证，符合RoHS标准。

000000

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

□□

