




SFENG 1984 PH



Model	SF-PH-15
Length	3.5m (11.48ft)
Width	3.00m (.1181")
Height	13.0(5.118")
Weight	300kg
Power	5A
Speed	50mm
Capacity	100kg
Material	Aluminum 7000



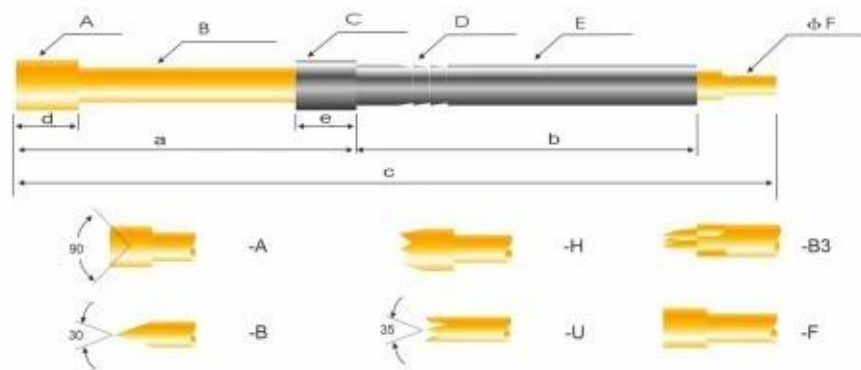

规格 Spec 型号 Type	SF-PH-1	SF-PH-2	SF-PH-3	SF-PH-4	SF-PH-5	SF-PH-6
A	1.20	1.50	2.00	2.50	3.50	5.00
B	0.75	0.95	1.29	1.80	2.50	3.50
C	1.20	1.50	2.00	2.50	3.50	5.00
D	0.98	1.34	1.83	2.33	3.23	4.55
E	0.98	1.27	1.77	2.27	3.17	4.55
F	0.47	0.56	0.75	1.25	1.62	2.45
a	7.0	10.0	16.0	16.0	16.0	16.0
b	9.5	13.0	16.0	18.0	18.0	19.5
c	20.5	27.0	36.0	38.0	38.0	40.0
d	1.0	2.0	2.0	3.0	3.0	4.0
e	1.0	2.0	2.0	3.0	3.0	1.5
Full travel 行程	3.5	6.0	8.3	10.5	10.0	10.5
Mounting hole size 钻孔尺寸	1.0/1.05	1.3/1.35	1.8/1.85	2.3/2.35	3.2/3.25	4.65/4.7
Recommended min. center 最小间距	1.70	2.00	2.50	3.00	4.20	5.50
Spring force 弹簧压力	100g	150g	150g	150g	200g	250g
Bress.Ni plated 针轴材质	磷铜	磷铜	磷铜	磷铜	磷铜	磷铜
Connections 接线形式	焊接	焊接	焊接	焊接或插 端子线	焊接或插 端子线	焊接或插 端子线



1. 24

2. OEM

3.

4.



1. 銅質 PCB ICT FCT 設備
2. Pogo pin 設備
3. BGA 設備
4. 銅質 QZ VZ LM 設備
5. 設備
6. 設備/設備
7. 設備 30#OK 設備 POM 設備

設備



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products



6. Packing



A5: [Placeholder]

Q6. [Placeholder]

A6: [Placeholder]

Q7. [Placeholder] **OEM** [Placeholder] **ODM** [Placeholder]

A7: [Placeholder] OEM/ODM [Placeholder]

Q8. [Placeholder]

A8: [Placeholder]