


□□□□

□□	SFENG
□□□□	SF-P058-B
□□	□□□□□
□□□	□□□□□ 7 □□□□□

□□□□

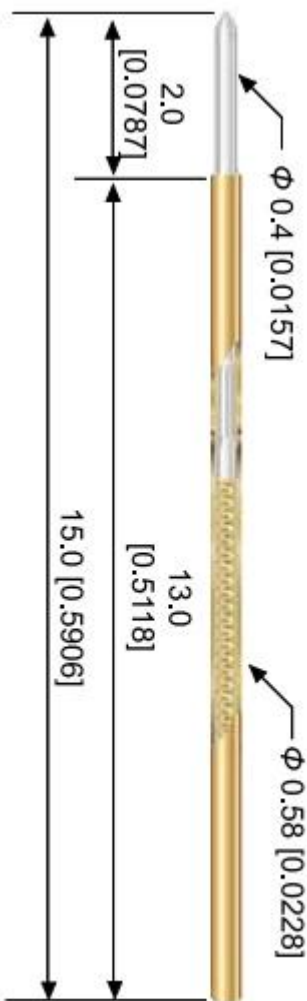

針軸 Plunger

高碳鋼鍍金

SK4 with Gold Plated

內管 Barrel

磷青銅鍍金

Phosphor Bronze with Gold Plated

彈簧 Spring

琴鋼線鍍金

Music Wire with Gold Plated

外管 Receptacle

磷青銅鍍金

Phosphor Bronze with Gold Plated

最小中心距 Min. Pitch

1.0mm [0.0394]

彈力最大行程

Spring Force @ Full Stroke

60g[2.12 oz]±20% @ 2.0mm[0.079]

2/3彈力行程

Spring Force @ 2/3 Stroke

45g[1.59 oz]±20%

額定電流 Current Rating

1A Continuous

接觸阻值 Contact Resistance

150 mΩ

□□□□□

1.□□□□□□□ □ 24 □□□□□□□□

2. 0000 00000000 OEM

3. 0000000 000000000000000000

4. 0000000 000000000000000000

0000

00000 pin (00) PCB0000000000FCT 000;

Pogo pin (000) 00000000 000 000 0000 0000; 000000000000

0000000 BGA 0000000;







0000000000 0000 LM 0 QZ 0 VZ 00;

0000000 000000 000;

000000 /socket;

00000000000030 # OK 0000000000000000

0000

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

□□□□

