


□□□□

□□□□	SF5150
□□ □□	3A
□□ □□	50□□
□□□	5.7□□
□□□□	4.0□□
□□□	150±20%gf@ □□ 4.0mm
□□□	100PCS
□□	□□
□□□□	5-10 □ □□ □□□

□□ □□

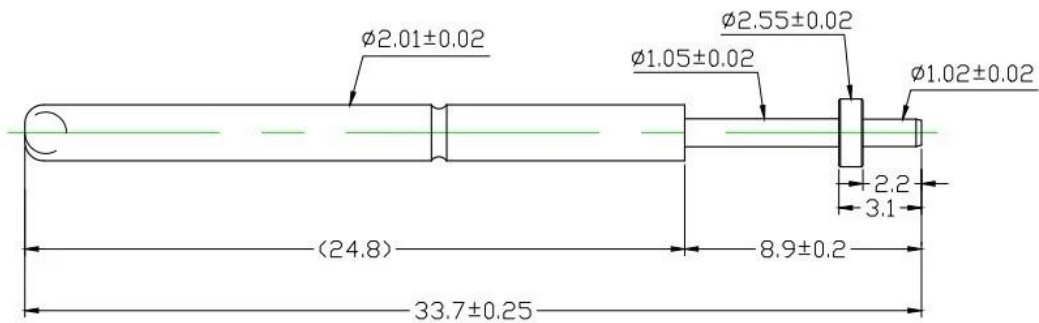

Materials(Plated) (材質與鍍層):  
 Barrel(針套) : Brass(黃銅) , Au on Ni Plated  
 Plunger(針軸) : Fe(易車鐵) , Ni Plated  
 Spring(彈弓) : SUS (不銹鋼線) , /

Specifications (技術要求):  
 Current Rating(額定電流) : 3A  
 Contact Resistance(接觸電阻) : ≤50mΩ  
 Full Stroke(滿沖程) : 5.7mm  
 Rated Stroke(額定沖程) : 4.0mm  
 Spring Force(額定彈力) : 150±20%gf@ load 4.0mm

					名称:		胜峰科技	
					SF-P125-G1.02X2.2(L33.7)-HAT-61		说明:	
							1. 所有尺寸单位为mm 2. 未注图示尺寸公差:按GB1804-79 11级精度执行	
标记	处数	更改文件号	签字	日期	图样标记	视图	质量	比例
设计					S	A	⊕	/
校对								
审核								图纸编号:
工艺				日期 2019-7-20	共 1 页	第 1 页		



## Production Flow (生产流程)



1. raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection







5. Finished products



6. Packing



## Measuring Equipment >



### Measuring Equipment:

1. Agilent current testing;
2. Quadratic element measurement
3. Load Curve Meter
4. Bond Test
5. Life Fatigue Test



