


□□□□

□□	SFENG
□□	SF-P020-B
□□	□□□□□□□□□□
□□	□□□□□□□□
□□	SK4□□□□
□□	80□
□□□□	2.0□□
□□	1A
□□	120MΩ
□□□□	1.0□□
□□□□□	0.75□□
MOQ	100 □
□□□□	7 □□□□□□□□

□□□□

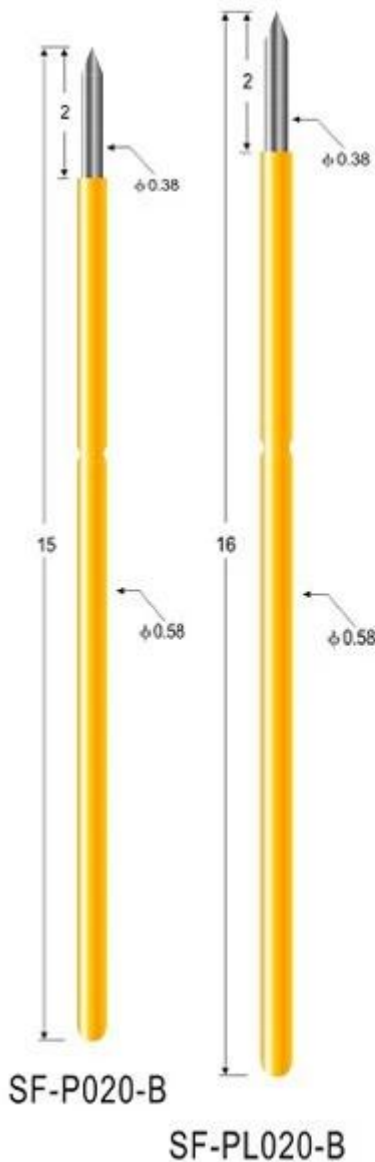

**Probe specifications SF-P020 PL020 (接)**

- Recommended minimum center(最小间距): 1.0mm(.0394 " )
- Mounting hole size(钻孔尺寸): 0.75mm(.0295 " )
- Full travel(行程): 2.0(.0787 " )
- Spring force(弹簧压力): 80g(克)
- Materials and finishes(材料及涂饰):  
Plunger:SK4,Rh plated  
Barrel:Phosphor bronze,Gold plated  
Spring:Music wire,Gold plated
- Current ration(额定电流): 1A(安培)
- Contact resistance(接触电阻): 120mΩ(毫欧姆)

Receptacle specifications  
Materials and finishes: Phosphor bronze, Gold plated



chinapogopinsupplier.com

## 公司简介

1. 24小时在线客服
2. 提供OEM服务
3. 提供定制服务
4. 提供技术支持

## 产品

- 
- PCB, ICT, FCT
- pogo pin

---BGA& ;







---LM ;

---...

---:/;

---O 30OKwirePOM

□□□□

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

□□□□

