


□□□□

□□□□	SF5797
□□□	5.0mm
□□□□	4.0mm
□□□	300±20%gf@10ad 4.0mm
□□□□	1.5±0.2mm
□□	Becu□“Au”on“Ni”□
□	Ph,□Au□on□Ni□□□
□□	Becu□“Au”on“Ni”□
□□	SWP
□□□□□	OEM & ODM
□□□□□	100PCS
□□	□□□□□□
□□	100% T/T□□□□
□□□□	□□□□□ 5-10 □

□□ □□

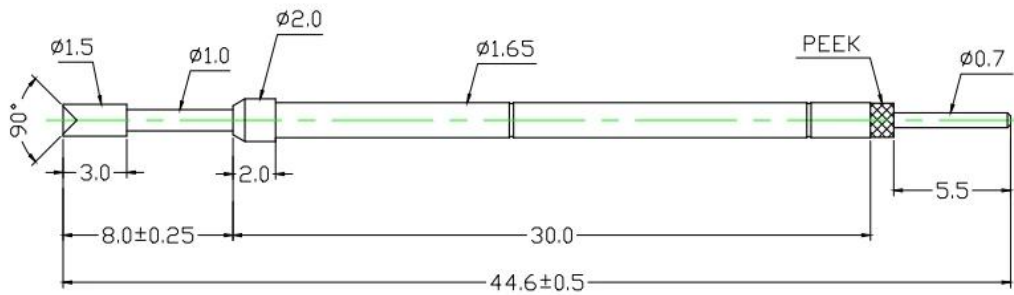

Specifications (技术要求) :

- Full Stroke (滿冲程) : 5.0mm
- Rated Stroke (額定冲程) : 4.0mm
- Spring Force (額定彈力) : 300±20%gf@ load 4.0mm
- Switching Path (开关距离) : 1.5±0.2mm

Materials (plated) (材質與鍍層) :

- Barrel (針套) : Ph (磷銅) , Au on Ni Plated
- Plunger (針軸) : BeCu (鍍銅) , Au on Ni Plated
- Tail pin(尾針) : BeCu (鍍銅) , Au on Ni Plated
- Spring (彈弓) : SWP (琴線) , Au on Ni Plated

□□ □□



1. raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products



6. Packing



Measuring Equipment >



Measuring Equipment:

1. Agilent current testing;
2. Quadratic element measurement
3. Load Curve Meter
4. Bond Test
5. Life Fatigue Test



