




SFENG 1984 pogo pin



型號	<b>SF-PH-15</b>
總長度	3.5mm(.1378")
針腳間距	3.00mm(.1181")
針腳高度	13.0(5.118")
針腳直徑	300µ
針腳形狀	5A
針腳厚度	50µ
針腳寬度	100µ
針腳重量	0.0007g



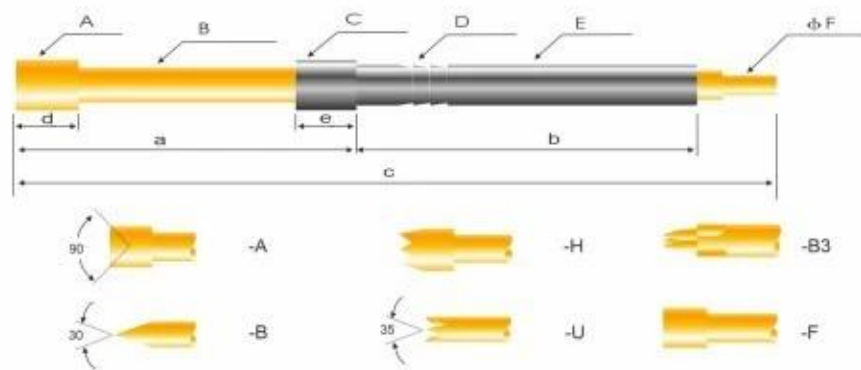

规格 Spec 型号 Type	SF-PH-1	SF-PH-2	SF-PH-3	SF-PH-4	SF-PH-5	SF-PH-6
A	1.20	1.50	2.00	2.50	3.50	5.00
B	0.75	0.95	1.29	1.80	2.50	3.50
C	1.20	1.50	2.00	2.50	3.50	5.00
D	0.98	1.34	1.83	2.33	3.23	4.55
E	0.98	1.27	1.77	2.27	3.17	4.55
F	0.47	0.56	0.75	1.25	1.62	2.45
a	7.0	10.0	16.0	16.0	16.0	16.0
b	9.5	13.0	16.0	18.0	18.0	19.5
c	20.5	27.0	36.0	38.0	38.0	40.0
d	1.0	2.0	2.0	3.0	3.0	4.0
e	1.0	2.0	2.0	3.0	3.0	1.5
Full travel 行程	3.5	6.0	8.3	10.5	10.0	10.5
Mounting hole size 钻孔尺寸	1.0/1.05	1.3/1.35	1.8/1.85	2.3/2.35	3.2/3.25	4.65/4.7
Recommended min. center 最小间距	1.70	2.00	2.50	3.00	4.20	5.50
Spring force 弹簧压力	100g	150g	150g	150g	200g	250g
Bress.Ni plated 针轴材质	磷铜	磷铜	磷铜	磷铜	磷铜	磷铜
Connections 接线形式	焊接	焊接	焊接	焊接或插 端子线	焊接或插 端子线	焊接或插 端子线



1. 24

2. OEM

3.

4.



1. PCB ICT FCT
2. Pogo pin
3. BGA
4. QZ VZ LM
- 5.
- 6.
7. 30# OK POM




1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop

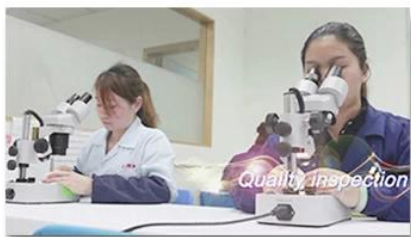

4. Quality inspection




5. Finished products



6. Packing





1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope



2023 ISO Certificate



Patent for Coaxial Structure



Patent for Honeycomb current probe



□□□□ DHL□UPS□FedEx□TNT□EMS □□

□□□□□□□□□□□□□□□□□□□□□□□□ Exwork□FOB□CNF□CIF □□□□□□□



A5: [Placeholder]

**Q6.** [Placeholder]

A6: [Placeholder]

**Q7.** [Placeholder] **OEM** [Placeholder] **ODM** [Placeholder]

A7: [Placeholder] OEM/ODM [Placeholder]

**Q8.** [Placeholder]

A8: [Placeholder]