



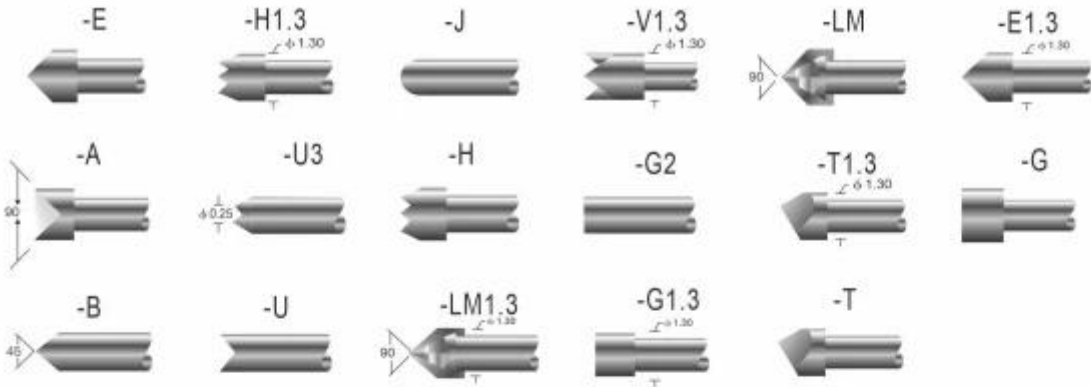

技术规格
PROBE SPECIFICATIONS

Recommended minimum center 最小间距	1.0mm(.0394 ")
Mounting hole size 钻孔尺寸	0.75mm(.0295 ")
Full travel 行程	2.0(.0787 ")
Spring force 弹簧压力	80g(克)
Materials and finishes 材料及涂饰	Plunger:SK4, Ni or Au plated BeCu, Ni or Au plated Phosphor bronze, Ni or Au plated Barrel:Phosphor bronze, Au plated Spring:Stainless steel
Current ration 额定电流	1A(安培)
Contact resistance 接触电阻	50mΩ(毫欧姆)

Receptacle specifications
Materials and finishes: Phosphor bronze,Gold plated

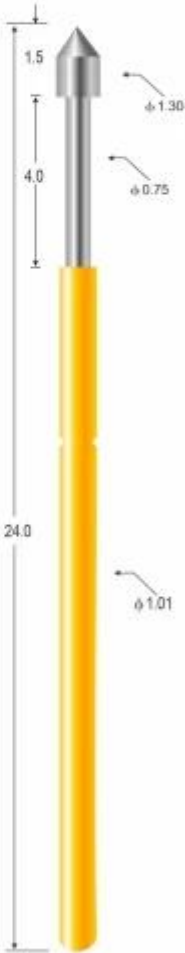

SP-P11-E

料	SF-P11
厚	1.0mm±.0394"
厚	0.75mm±.0295"
厚	2.0±.0787"
厚	80
厚	SK4 厚 厚
厚	1A
厚	50
厚	100
厚	厚7

厚

- 1.厚24厚
- 2.厚OEM
3. 厚
- 4.厚

厚

- 1.厚PCB厚ICT厚FCT厚
 - 2.Pogo pin厚
 - 3.厚BGA厚
 - 4.厚QZ厚VZ厚LM厚
 - 5.厚
 - 6.厚/厚
 - 7.厚30#OK厚POM厚
- 厚

厚



□□□□



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection




5. Finished products



6. Packing



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope



Q1. 請說明

A1: 請說明

Q2. 請說明

A2: 請說明QC

Q3. 請說明

A3: 請說明

Q4. 請說明

A4: 請說明

Q5. 請說明

A5 請說明m

Q6. 請說明

A6: 請說明

Q7. 請說明 OEM 與 ODM 的

A7: 請說明 OEM /ODM . P

Q8. 請說明

A8: 請說明

請說明

請說明 DHL、UPS、FedEx、TNT、EMS

請說明 Exwork、FOB、CNF、CIF



0000



2023 ISO Certificate



Patent for Coaxial Structure



Patent for Honeycomb current probe

0000







000000



CIBF2021

苏州胜亿福睿电子科技有限公司
Suzhou Shengyifurui Electronic Technology Co., Ltd

No.3B013

