

□□□□

□	ENG
□□	□□□□SF-KP2.96 * 54□□□□
□□	□□□
□□	□□
□□	□□□
□□	□□□
□□□□	5.0□□
□□□□	□□
□□□□	□□
□□	□□
□□□□	□□
□□□	100
□□□□	□□□□□7□


□□□□



SFENG
The China's The World's



□□□□□□

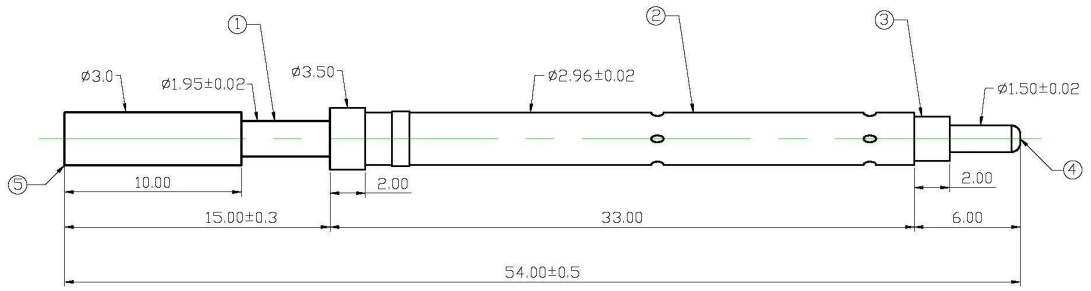

材质与电镀;

- ①针 头, 磷铜镀金;
- ②套 管, 黄铜镀镍;
- ③绝缘套, PEEK;
- ④尾 针, 磷铜镀金;
- ⑤绝缘套, 白色POM

技术要求;

- 满行程: 5.0mm
- 满行程弹力: $450g \pm 90g$
- 开关距离: 1.5mm
- 开关弹力: $120g \pm 25g$

名 称:					胜峰科技					
SF-开关针新PEEK 2.96X54带塑料头					说明:					
标记处数					1. 所有尺寸单位为mm					
更改文件号					2. 未注图示尺寸公差:按GB1804-79 11级精度执行					
签 字					图 样 标 记	视 图	质 量	比 例	图 纸 编 号:	
日期					S	A	⊕	1:1		
设计					共 1 页		第 1 页			
校 对					工 艺		日 期		2018-11-8	
审 核					HJQ					

□□□□

1. □□□□

2. □□□□

3. □□□□□□□□

4. □□□□□□□□

□□□□

PCB □ ICT □ FCT □ □ □ □ □ □ □ □ □ □

□□□

BGA □ □ □ □ □ □ □ □ □ □

□□□□□□□□ LM □ QZ □ VZ □ □ □

□□□□□□□□□□□□□□

□□□□□□□□ □ □ □;

□□□□□□□□ 30 □ OK □ □ □ □ □ □ POM □ □ □ □ □ □

□□□□



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products



6. Packing



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope



Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.

