



SFENG 1984 XXXXXXXXXX






Model	SF-P125
Resolution	1.90mm @ 0.0748"
Resolution	1.35mm @ 0.0532" 1.40mm @ 0.0551"
Resolution	6.30 @ 2481"
Resolution	120"
Resolution	Be Cu, Rh Be Cu Be Cu
Resolution	3A
Resolution	50"
Resolution	100"
Resolution	7000"



技术规格 PROBE SPECIFICATIONS

Recommended minimum center 最小间距	3.17mm(.1248 ")
Mounting hole size 钻孔尺寸	压克力: 2.45mm(.0532 ") 电木板、玻璃纤维板: 1.40mm(.0551 ")
Full travel 行程	6.3(.2481 ")
Spring force 弹簧压力	120g(克)
Materials and finishes 材料及涂饰	Plunger: SK4, Ni or Au plated BeCu, Ni or Au plated Phosphor bronze, Ni or Au plated Barrel: Brass, Au plated Spring: Stainless steel
Current ration 额定电流	3A(安培)
Contact resistance 接触电阻	50mΩ(毫欧姆)

Receptacle specifications
Materials and finishes: Phosphor bronze, Gold plated

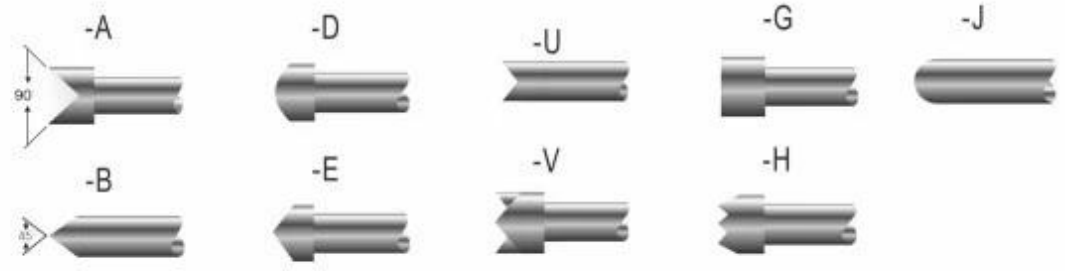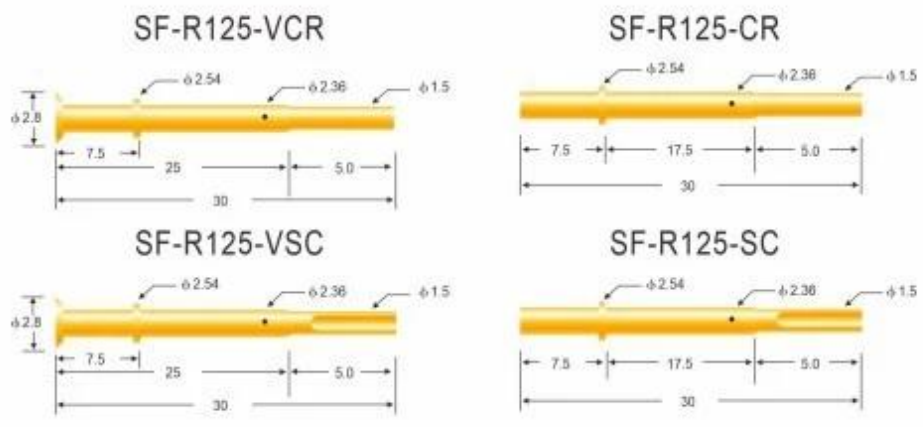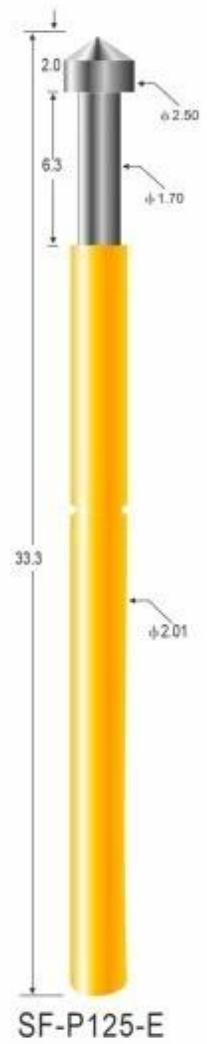

1. 24-pin probe
2. OEM
3. Probe specifications
4. Probe specifications



1. 物料清單PCB ICT FCT
2. Pogo pin
3. BGA
4. QZ VZ LM
- 5.
6. /
7. 30#OK POM



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products



6. Packing



A5: [Placeholder]

Q6. [Placeholder]

A6: [Placeholder]

Q7. [Placeholder] **OEM** [Placeholder] **ODM** [Placeholder]

A7: [Placeholder] OEM/ODM [Placeholder]

Q8. [Placeholder]

A8: [Placeholder]