





SFENG 1984 [redacted] [redacted]



Model	SF-PL50
Resolution	1.27mm, 0.0500"
Vertical Resolution	V: 0.90mm, 0.0354" 0.95mm, 0.0374"
Horizontal Resolution	4.20, 0.1654"
Resolution	120
Coatings	Be, Cu, Rh, SK4, Rh
Current	3A
Resolution	50
Resolution	100
Resolution	7000



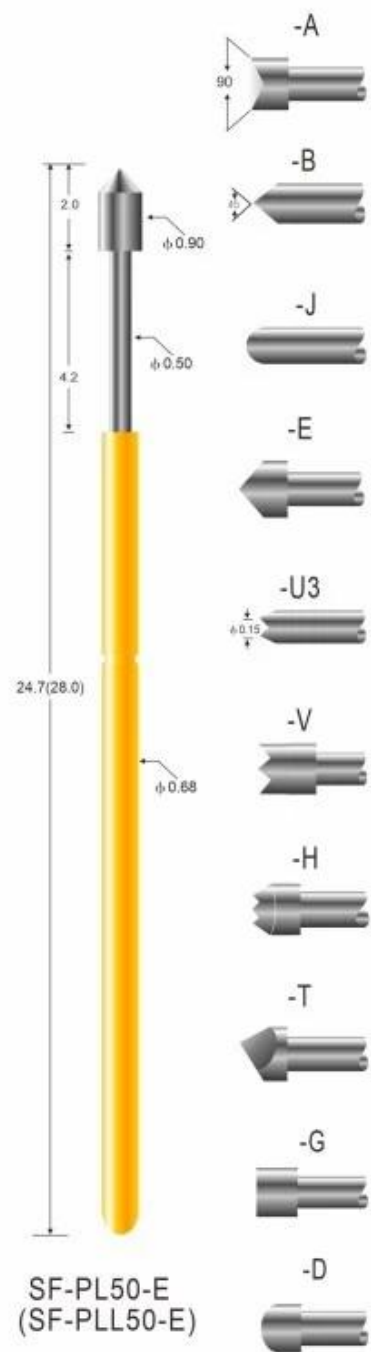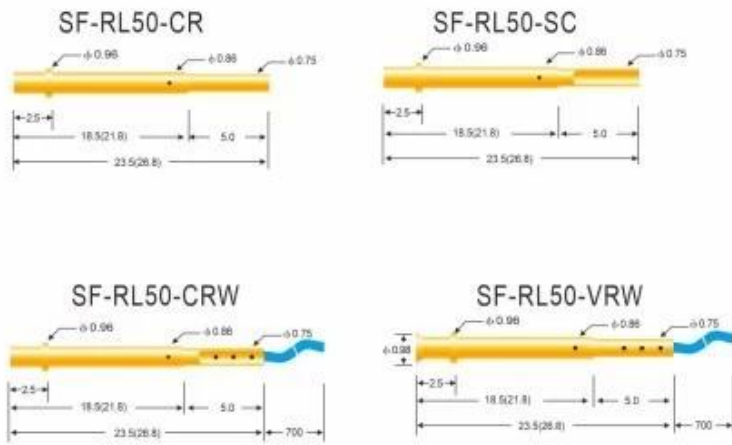

### 技术规格 PROBE SPECIFICATIONS

Recommended minimum center 最小间距	1.27mm(.0500 " )
Mounting hole size 钻孔尺寸	V: 0.90mm(.0354 " ) W: 0.95mm(.0374 " )
Full travel 行程	4.20(.1654 " )
Spring force 弹簧压力	120g(克)
Materials and finishes 材料及涂饰	Plunger:SK4, Ni or Au plated BeCu, Ni or Au plated Barrel:Phosphor bronze, Au plated Spring:Stainless steel
Current ration 额定电流	3A(安培)
Contact resistance 接触电阻	50mΩ(毫欧姆)

Receptacle specifications  
Materials and finishes: Phosphor bronze,Gold plated




1. 24
2. OEM
- 3.
- 4.



1. PCB ICT FCT
2. Pogo pin
3. BGA
4. QZ VZ LM
- 5.
- 6.
7. 30# OK POM



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope





2023 ISO Certificate



Patent for Coaxial Structure



Patent for Honeycomb current probe



□□□□ DHL□UPS□FedEx□TNT□EMS □□□

□□□□□□□□□□□□□□□□□□□□□□□□ Exwork□FOB□CNF□CIF □□□□□□□



Q1. 〇〇〇〇〇〇〇〇

A1: 〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇

Q2. 〇〇〇〇〇〇〇〇

A2: 〇〇〇〇〇〇〇QC〇〇

Q3. 〇〇〇〇〇〇

A3: 〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇

Q4. 〇〇〇〇〇〇

A4: 〇〇〇

Q5. 〇〇〇〇〇〇〇〇〇〇〇

A5: [Placeholder]

**Q6.** [Placeholder]

A6: [Placeholder]

**Q7.** [Placeholder] **OEM** [Placeholder] **ODM** [Placeholder]

A7: [Placeholder] OEM/ODM [Placeholder]

**Q8.** [Placeholder]

A8: [Placeholder]