




SFENG 1984  
 1984年12月24日



品名	PV1-H-H M8*26.5
规格	50A
数量	1000
备注	70000



S'9Zx8W H-H M8x26.5

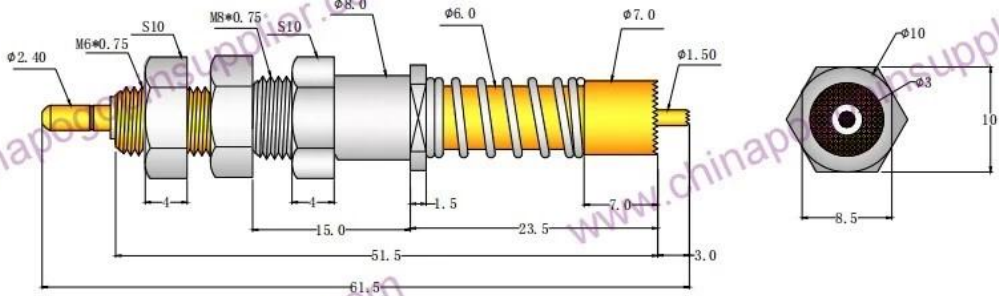

- 技术参数
- 1、中心针 铍铜/镀金
  - 2、大针杆 黄铜/镀金
  - 3、针套 黄铜/镀镍
  - 4、螺帽 黄铜/镀镍
  - 5、弹簧 SUS304
  - 6、弹力 中心针 下压3.0 280-300g  
大针杆 压平 2000g

说明: 1、所有尺寸的单位为mm  
 2、未注图示尺寸公差:  
 X. ±0.15  
 X.X ±0.1  
 X.XX ±0.05

设计	校对	审核	工艺	标准化	制图	日期	图样标记	质量比例
					徐松孟	2016.04.15	S A	2:1
共 1 页 第 1 页								

胜峰探针

50A电流针

PV1-H-H M8x26.5




1. 1984年12月24日

2. OEM






1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope



2023 ISO Certificate



Patent for Coaxial Structure



Patent for Honeycomb current probe



□□□□ DHL □ UPS □ FedEx □ TNT □ EMS □ □ □

□□□□□□□□□□□□□□□□□□□□□□□□□□□□ Exwork □ FOB □ CNF □ CIF □ □ □ □ □ □ □ □ □ □



Q1. 請說明

A1: 請說明

Q2. 請說明

A2: 請說明

Q3. 請說明

A3: 請說明

Q4. 請說明

A4: 請說明

Q5. 請說明

A5: [Placeholder]

**Q6.** [Placeholder]

A6: [Placeholder]

**Q7.** [Placeholder] **OEM** [Placeholder] **ODM** [Placeholder]

A7: [Placeholder] OEM/ODM [Placeholder]

**Q8.** [Placeholder]

A8: [Placeholder]