

参数

语言	ENG
型号	SFM100
长度	100mm
直径	3.0mm
重量	100g
材料	3.0mm
精度	3.0mm
公差	3.0mm
表面	3.0mm
硬度	3.0mm
耐磨	3.0mm
耐腐蚀	3.0mm
使用寿命	100
维护	3.0mm

参数





□□□□□□




SF-M100


可选用的针头形式					特殊版本	
材料	针头类型		针头 电镀	ϕ		ϕ (inch)
AU	A		$\phi 1.5$	A		
AU	B		$\phi 0.45$	A		
AU	B1		$\phi 0.7$	A		
AU	H		$\phi 1.5$	A		
AU	J		$\phi 0.5$	A		
AU	D		$\phi 0.65$	A	$\phi 1.0$	
AU	DG		$\phi 1.0$	A		
AU	J1		$\phi 0.4$	A		
AU	D2		$\phi 0.6$	A		
AU	G		$\phi 1.0$	A	$\phi 1.5$	
AU	V		$\phi 1.5$	N		
AU	T		$\phi 1.5$	N		

安装和功能的尺寸

M100

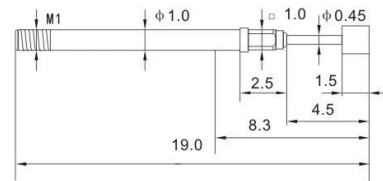

MR100

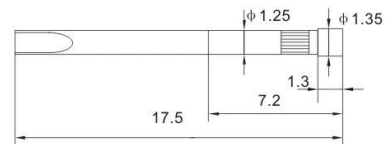

用来测试电缆束的探针
螺钉，螺丝 螺纹设计
可用的螺旋工具

技术参数

间距:	1.91 mm/75mil
全行程:	3.00 mm
工作行程:	2.40 mm
预装弹力:	0.20 N
在工作行程下的弹力:	0.8 N

电气数据

电流:	3.0 A
电阻:	≤ 20 mOhm

材质

针管:	黄铜，镀金
弹簧:	不锈钢
针杆:	镀铜，镀金
套管:	黄铜，镀金

推荐的钻孔直径

HP2361.1 (保温、隔热材料)	1.25 mm
HGW2372 (玻璃棉，玻纤棉)	1.26 mm

2. 物料

3. 物料

4. 物料

物料

PCB、ICT、FCT

物料

BGA

物料、LM、QZ、VZ

物料

物料/

物料30OK、POM

物料



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products




6. Packing


物料



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope



Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.

