
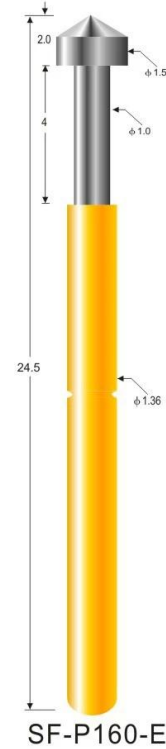


□□□□□

□	ENG
□□□□	1□□□□□□□□□
□□	SF-PA160
□□	□□□□/□
□□	□□□□□
□□	□□□
□□	2N□7.2□□□
□□□	100□

# SF-P160

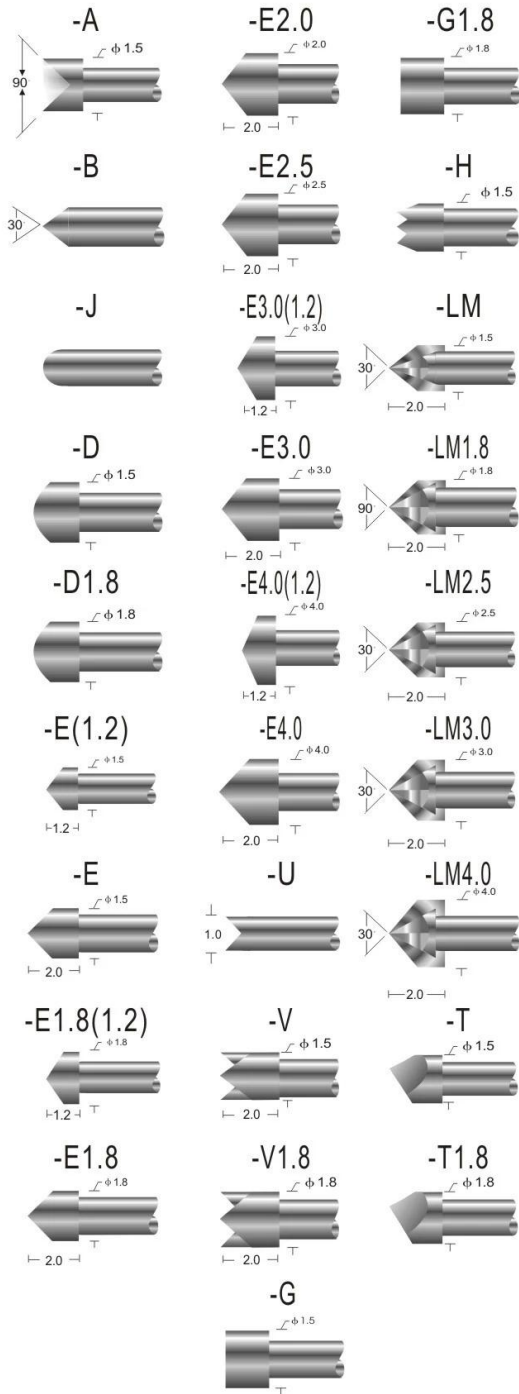

## Probe specifications SF-P160(技术规格)

- Recommended minimum center(最小间距): 2.54mm(.1000 ")
- Mounting hole size(钻孔尺寸):  
压克力: 1.70mm(.0670 ")  
电木板、玻璃纤维板: 1.75mm(.0689 ")
- Full travel(行程): 4.0(.1575 ")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰):  
Plunger: Be Cu, Rh plated; SK4, Rh plated  
Barrel: Brass, Gold plated  
Spring: Stainless steel
- Current ration(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50mΩ (毫欧姆)





**SFENG**  
The China's The World's





**SFENG**  
The China's The World's



**SFENG**  
The China's The World's



# 公司简介

1. 提供24小时售后服务
2. 提供OEM服务
3. 提供定制服务
4. 提供快速打样服务

# 服务领域

提供PCB、ICT、FCT等  
提供BGA、QFN、QML、QZ、VZ、LM、  
提供30% OK、POM等

# 地址



# 联系我们





1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection




5. Finished products



6. Packing



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope



Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.

