

# ICT SF-PS160-T1.36 \* 10.56MM


□□□□

□	ENG
□□□□	PS160-D□2.0□
□□	□□□Becu□□□□□
□	□□□□□□□
□□	SK4□□□□
□□□	□□□□□□
□□□	100□
□□□□	□□□□□□7□□□□

□□□□

**SFENG**  
The China's The World's



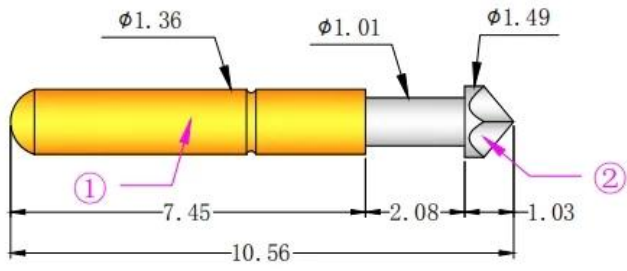

Materials(Plated) (材質與鍍層) :

- ①Barrel(針套) : Brass(黃銅) , Au on Ni Plated
- ②Plunger(針軸) : Brass(黃銅) , Ni Plated
- Spring(彈弓) : SUS304 (不鏽鋼線) , /

Specifications (技術要求) :

- Current Rating(額定電流) : 3A
- Contact Resistance(接觸電阻) : <50mΩ
- Full Stroke(滿沖程) : 2.08mm
- Spring Force(額定彈力) : 150~200gf@ load 2.08mm

□□□□

1.24□□□□□□□□□□

2.□□□□□□□□OEM

3.□□□□□□□□□□□□□□□□

4.□□□□□□□□□□□□□□□□

□□□□

---□□PCB□ICT□FCT□□□□□□□□□□□□

--- Pogopin□connector□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□

□□□□□□;

---□□□□□BGA□□□□□□□;

---□□□□□□□□□□LM□QZ&VZ□□;

---□□□□□□□□□□□□□□□...


---□□□□□□/□□□□

---□□□□□□□□□□30□OKwire□□□□□□POM□Ironhinge□

□□□□



1. Agilent current testing



2. Quadratic element




3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope



Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.

