

# ICT SF-PS160-T1.36 \* 10.56MM


□□□□

□	ENG
□□□□	PS160-D□2.0□
□□	□□□Becu□□□□□
□	□□□□□□□
□□	SK4□□□□
□□□	□□□□□□
□□□	100□
□□□□	□□□□□□7□□□□

□□□□

**SFENG**  
The China's The World's



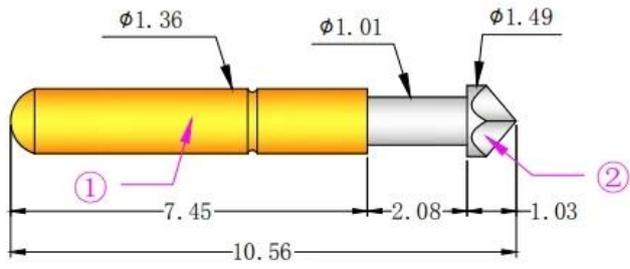

Materials (Plated) (材質與鍍層):

- ① Barrel (針套) : Brass (黃銅) , Au on Ni Plated
- ② Plunger (針軸) : Brass (黃銅) , Ni Plated
- Spring (彈弓) : SUS304 (不鏽鋼線) , /

Specifications (技術要求):

- Current Rating (額定電流) : 3A
- Contact Resistance (接觸電阻) : < 50mΩ
- Full Stroke (滿行程) : 2.08mm
- Spring Force (額定彈力) : 150~200gf @ load 2.08mm

□□□□

1. 24□□□□□□□□□□

2. □□□□□□□□ OEM

3. □□□□□□□□□□□□□□□□

4. □□□□□□□□□□□□□□□□

□□□□

--- □□ PCB □ ICT □ FCT □ □□□□□□□□□□□

--- Pogopin □ connector □ □□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□

□□□□□□;

--- □□□□□ BGA □□□□□□;

--- □□□□□□□□□□ LM □ QZ & VZ □□;

--- □□□□□□□□□□□□□□...


--- □□□□□□ / □□□□

--- □□□□□□□□□□ 30 □ OK wire □□□□□□ POM □ Ironhinge □

□□□□



1. Agilent current testing

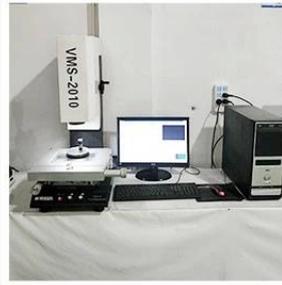

2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope



Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.

