


	SFENG
	SF-PH-1
	SUS[[[[[]]]
	100□
	3.5
	3A
	50mW
	1.70
	1.0 / 1.05
MOQ	100 🛮
	00007000

SF-PH10.12.18.23.32.45

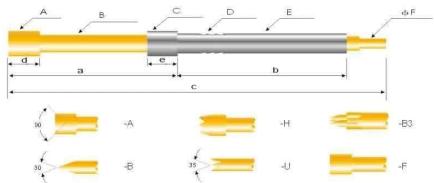

规格 Spec 型号 Type	SF-PH-10	SF-PH-12	SF-PH-18	SF-PH-23	SF-PH-32	SF-PH-45
Α	1.20	1.50	2.00	2.50	3.50	5.00
В	0.75	0.95	1.29	1.80	2.50	3.50
С	1.20	1.50	2.00	2.50	3.50	5.00
D	0.98	1.34	1.83	2.33	3.23	4.55
E	0.98	1.27	1.77	2.27	3.17	4.55
F	0.47	0.56	0.75	1.25	1.62	2.45
a	7.0	10.0	16.0	16.0	16.0	16.0
b	9.5	13.0	16.0	18.0	18.0	19.5
с	20.5	27.0	36.0	38.0	38.0	40.0
d	1.0	2.0	2.0	3.0	3.0	4.0
e	1.0	2.0	2.0	3.0	3.0	1.5
行程 Full travel	3.5	6.0	8.3	10.5	10.0	10.5
钻孔尺寸 Mounting hole siza	1.0/1.05	1.3/1.35	1.8/1.85	2.3/2.35	3.2/3.25	4.65/4.7
最小间距 Recommended min.center	1.70	2.00	2.50	3.00	4.20	5.50
弹簧压力 Spring force	100g	150g	150g	150g	200g	250g
针轴材质 Bress,Ni.plated	磷铜	磷铜	磷铜	磷铜	磷铜	磷铜
接线形式 Connections	焊接	焊接	焊接	焊接或插 端子线	焊接或插 端子线	焊接或指 端子线

www.shengfengdz.com



- 1.000000 2400000000
- 2.000000EM0000

00000;00/00;

____30_OK____POM____

