


□□□□

□□	SFENG
□□□□	SF-P156
□□	□□
□□	□□
□□	SUS□□□□
□□	250□
□□	6.30□0.2480''□
□□	5A
□□	50mW
□□□□	4.75□0.1870''□
□□□□□	2.75□0.1083''□/ 2.80□0.1102''□
MOQ	100 □
□□□□	□□□□□□7□□□□□

□□□□

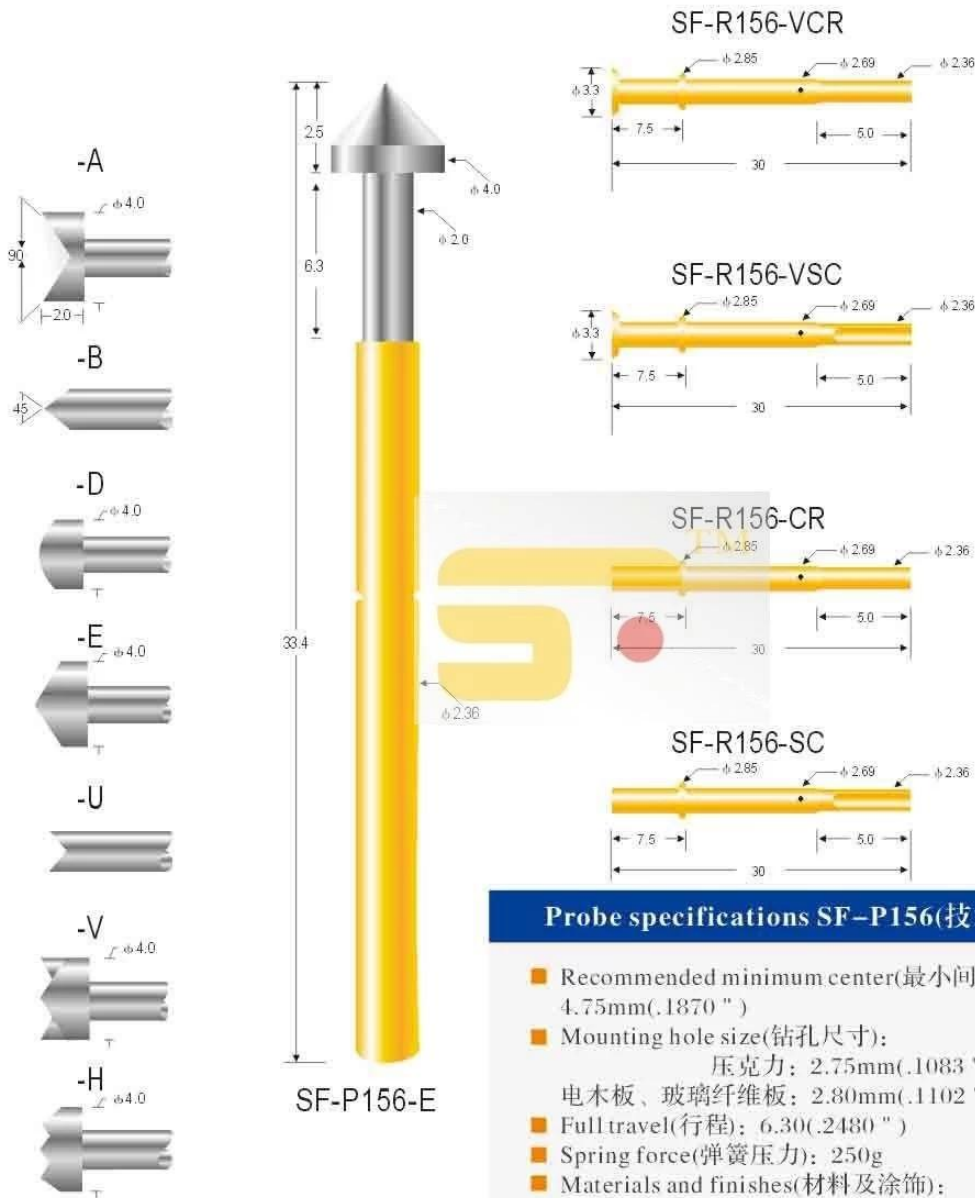

## Probe specifications SF-P156(技术规格)

- Recommended minimum center(最小间距): 4.75mm(.1870")
- Mounting hole size(钻孔尺寸):  
压克力: 2.75mm(.1083")  
电木板、玻璃纤维板: 2.80mm(.1102")
- Full travel(行程): 6.30(.2480")
- Spring force(弹簧压力): 250g
- Materials and finishes(材料及涂饰):  
Plunger: Be Cu, Rh plated;  
Barrel: Brass, Gold plated  
Spring: Stainless steel
- Current rating(额定电流): 5A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)
- Connections(接线形式):  
Crimp: R156-VCR, R156-CR  
Solder cup: R156-VSC, R156-SC



chinapogopinsupplier.com

### 优势

1. 24小时服务
2. OEM
- 3.
- 4.

### 产品

PCB ICT FCT;  
;  
BGA;







□□□□□□□□□□LM□□QZ□VZ□□;

□□□□□□□□□□□□□□;

□□□□□;□□/□□;

□□□□□□□□□□30□OK□□□□□□□□POM□□□□□□

□□□□

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

□□□□

