




SFENG 1984 ■■■■■■■■




型番	SF-PM-200
定格電圧	2.54V(1.000V)
定格電流	2.00mA(.0787")
定格電圧	12.0V(.4724")
定格電流	300mA
定格電圧	5A
定格電流	50mA
定格電圧	100V
定格電流	0.00007mA




SF-PH15-B3

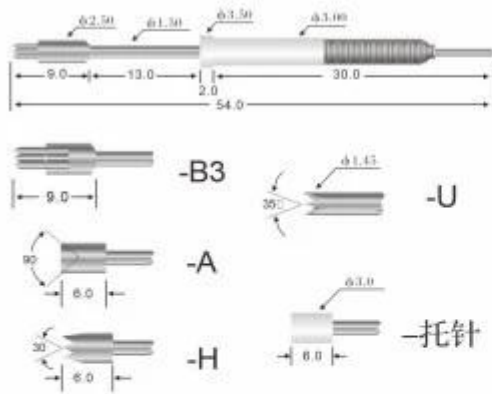


SF-PH18-B3

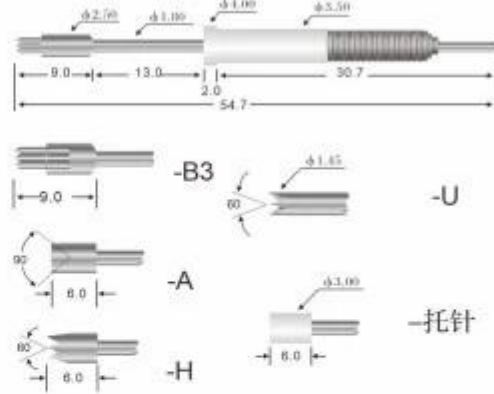

SF-PH101-B3

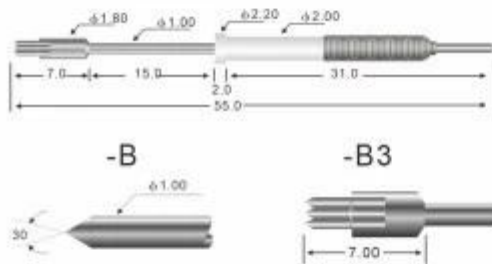

SF-PM200-B3

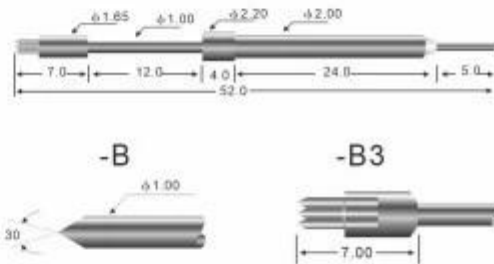

技术规格 PROBE SPECIFICATIONS

	SF-PH15	SF-PH18	SF-PH101	SF-PM200
Recommended minimum center 最小间距	3.50mm(.1378 ")	4.30mm(.1693 ")	2.54mm(.1000 ")	2.54mm(.1000 ")
Mounting hole size 钻孔尺寸	3.00mm(.1181 ")	3.50mm(.1378 ")	2.00mm(.0787 ")	2.00mm(.0787 ")
Full travel 行程	13.0(.5118 ")	13.0(.5118 ")	15.0(.5905 ")	12.0(.4724 ")
Spring force 弹簧压力	300g	300g	300g	300g
Current rating 额定电流	5A(安培)	5A(安培)	5A(安培)	5A(安培)
Contact resistance 接触电阻	50m Ω (毫欧姆)	50m Ω (毫欧姆)	50m Ω (毫欧姆)	50m Ω (毫欧姆)



1. 24-pin probe
2. OEM probe
3. 24-pin probe
4. 24-pin probe



1. PCB/ICT/FCT
2. Pogo pin
3. BGA
4. QZ/VZ/LM
- 5.
6. /
7. 30#OK/POM

[illegible]

1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection




5. Finished products



6. Packing





□□□□ DHL□UPS□FedEx□TNT□EMS □□□

Exwork FOB CNF CIF



Q1. 請說明

A1: 請說明

Q2. 請說明

A2: 請說明QC

Q3. 請說明

A3: 請說明

Q4. 請說明

A4: 請說明

Q5. 請說明

