



0000

0	SFENG
0000	SF-P020-B
00	00000
0000	000000700000


0000




SF-P020

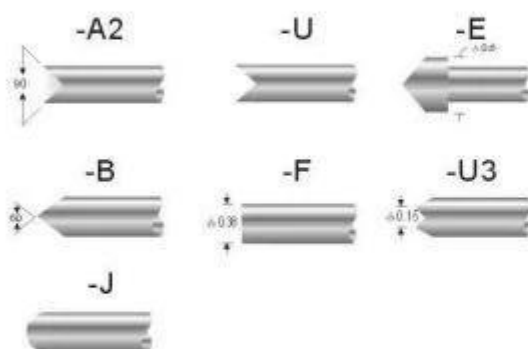

SF-R020-VR




SF-R020-VRW



SF-RL020-VR



SF-RL020-VRW

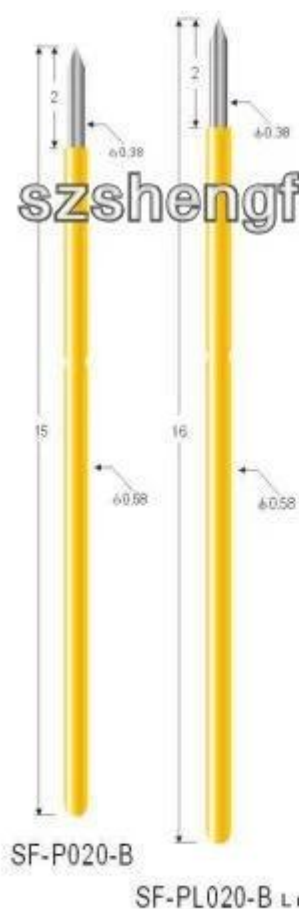

SF-P020-B

SF-PL020-B L means Length

szshengfengdz.en.alibaba.com

Probe specifications SF-P020 PL020 (技术规格)

- Recommended minimum Spacing(最小间距): 1.0mm(.0394 ")
- Mounting hole size(钻孔尺寸): 0.75mm(.0295 ")
- Full travel(行程): 2.0(.0787 ")
- Spring force(弹簧压力): 80g(克)
- Materials and finishes(材料及涂饰):
Plunger:SK4, Ni plated
Barrel:Phosphor bronze,Gold plated
Spring:Music wire,Gold plated
- Current ration(额定电流): 1A(安培)
- Contact resistance(接触电阻): 120mΩ(毫欧姆)

Receptacle specifications

Materials and finishes: Phosphor bronze,
Gold plated

□□□□□

1.□□□□□□□□ 24□□□□□□□□□□

2.□□ □□□□OEM□□□□

3.□□□□□□ □□□□□□□□□□□□□□□□□□□□

