
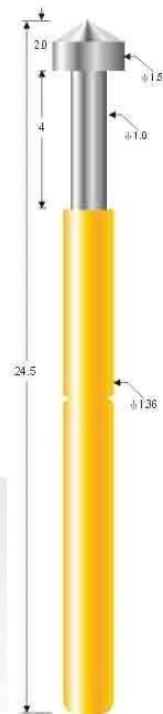
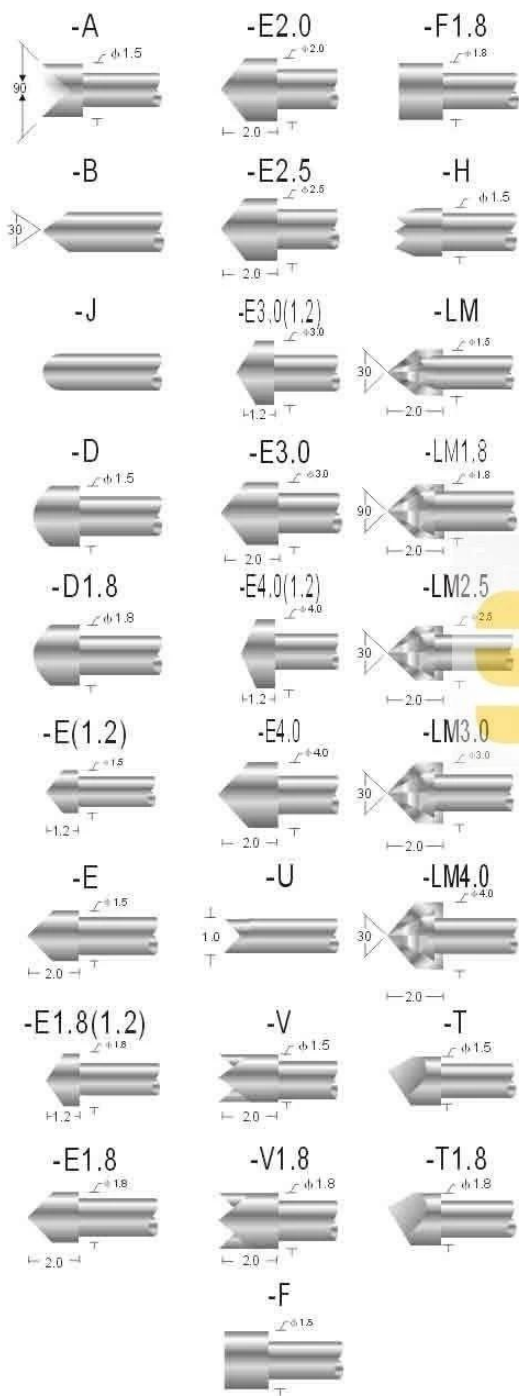


□□□□

| | |
|-------|------------------------------|
| □□ | SFENG |
| □□□□ | SF-P160 |
| □□ | □□ |
| □□ | □□ |
| □□ | SUS□□□ |
| □□□ | 200□ |
| □□□□ | 4.0□0.1575"□ |
| □□ | 3A |
| □□ | 50mW |
| □□□□ | 2.54□0.1000"□ |
| □□□□□ | 1.70□0.0670"□/ 1.75□0.0689"□ |
| MOQ | 100 □ |
| □□□□ | □□□□□7□□□□ |

□□□□

SF-P160



SF-P160-E

Probe specifications SF-P160(技术规格)

- Recommended minimum center(最小间距): 2.54mm(.1000 ")
- Mounting hole size(钻孔尺寸):
压克力: 1.70mm(.0670 ")
电木板、玻璃纤维板: 1.75mm(.0689 ")
- Full travel(行程): 4.0(.1575 ")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰):
Plunger: Be Cu, Rh plated; SK4, Rh plated
Barrel: Brass, Gold plated
Spring: Stainless steel
- Current ration(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50mΩ (毫欧姆)

胜峰探针
SFENG
The China's The World's



chinapogopinsupplier.com







□□□□□□□□□□LM□□QZ□VZ□□;

□□□□□□□□□□□□□□;

□□□□□;□□/□□;

□□□□□□□□□□30□OK□□□□□□□POM□□□□□□

□□□□

| | | |
|---|---|--|
| Spring exhausted tester | DC power supply | Current resistance tester |
|  |  |  |
| Microscope | Tensile strength tester | Spring tester |
|  |  |  |

□□□□

