

□□□□□□□□□□□□□□□□

□□□□□□□□

□□□□□□□□, □□□□□□□□□□□□

□□□□□□□□□□, □ onlt □□□□□□□□□□□□


□□□□□□□□

**SFENG**





□□□□□

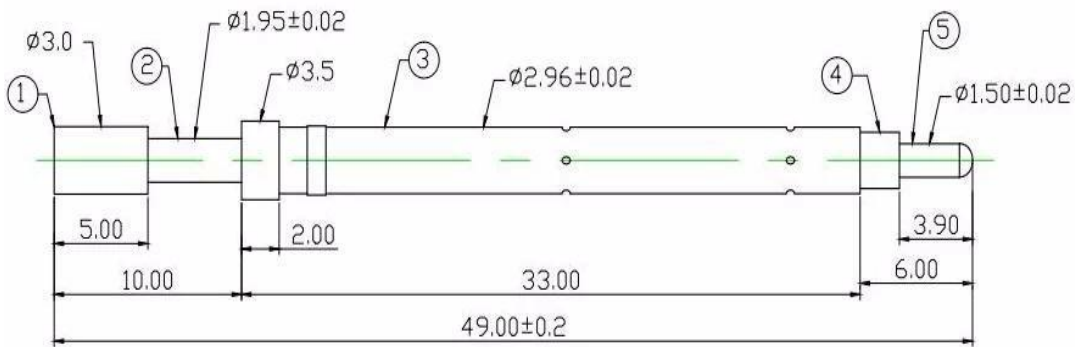

**Material and plating**

- 1. Tip: POM
- 2. Plunger: brass, gold plated
- 3. Barrel: brass, gold plated
- 4. Insulation sleeve: PEEK
- 5. End pin: Ph, gold plated

**Specification**

- 1. Switch distance: 1.5mm
- 2. Spring force: 100g@1.5mm

Suzhou Shengteng Electronic Co.,Ltd  
 Contact: Ellie  
 Email: ellie@sf-probe.com

□□□□□

