□□□□

SFENG □□□1984□□□

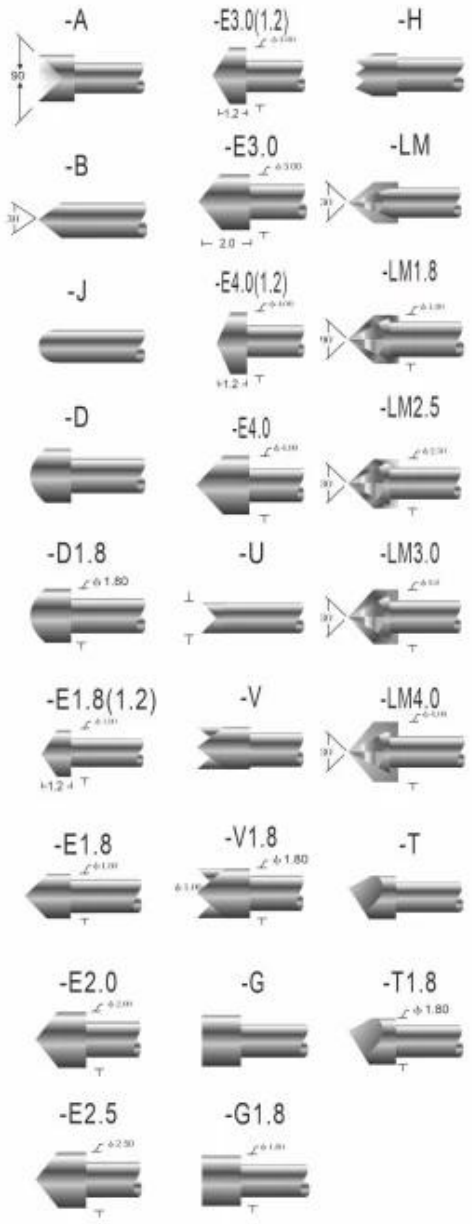

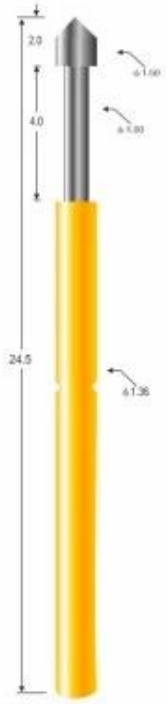

SF-P160-E

技术规格
PROBE SPECIFICATIONS

Recommended minimum center 最小间距	2.54mm(.1000 ")
Mounting hole size 钻孔尺寸	压克力：1.70mm(.0670 ") 电木板、玻璃纤维板：1.75mm(.0689 ")
Full travel 行程	4.0(.1575 ")
Spring force 弹簧压力	200g(克)
Materials and finishes 材料及涂饰	Plunger:BeCu，Ni or Au plated Phosphor bronze，Ni or Au plated Barrel:Phosphor bronze，Au plated Spring:Stainless steel
Current ration 额定电流	3A(安培)
Contact resistance 接触电阻	50mΩ(毫欧姆)

Receptacle specifications
Materials and finishes：Phosphor bronze,Gold plated

SF-R160-VCR

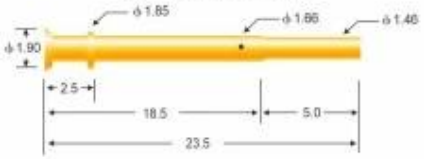

SF-R160-VW

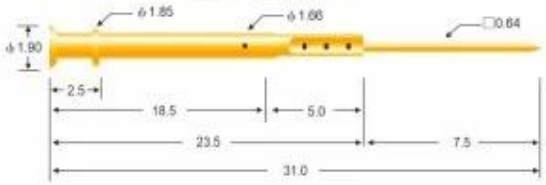

SF-R160-CR

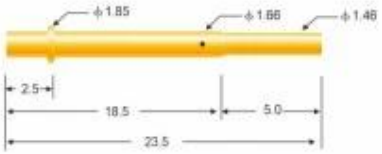

SF-R160-WW

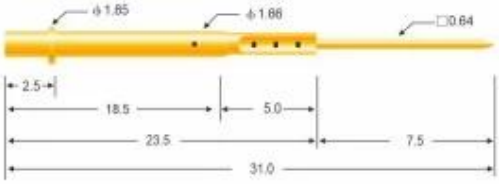

SF-R160-CR5.3

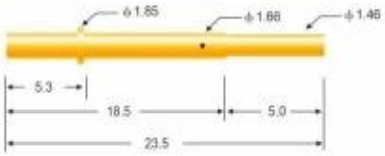

SF-R160-WW5.3

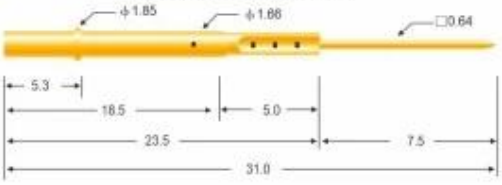

SF-R160-VSC

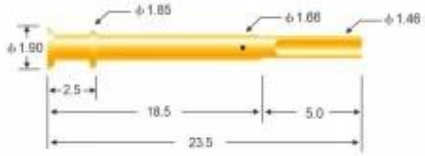

SF-R160-SC

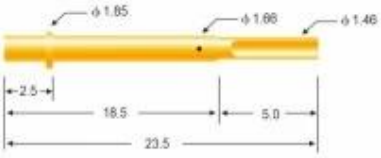

SF-R160-SC5.3

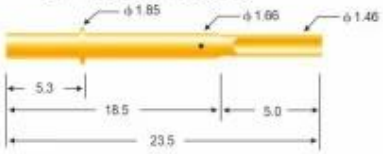

技术规格
PROBE SPECIFICATIONS

Recommended minimum center 最小间距	2.54mm(.1000 ")
Mounting hole size 钻孔尺寸	压克力：1.70mm(.0670 ") 电木板、玻璃纤维板：1.75mm(.0689 ")
Materials and finishes 材料及涂饰	Barrel:Brass,Au plated
Connectioins 接线形式	Crimp：R160-VCR,R160-CR,R160-CR5.3 Solder cup：R160-VSC，R160-SC, R160-SC5.3 Wire wrap：R160-VW,R160-WW, R160-WW5.3

Receptacle specifications
Materials and finishes：Phosphor bronze,Gold plated

□□□□□

1.□□□□□24□□□□□□□□□□□

2.□□□□□□□□□OEM□

3. □□□□□□□□□□□□□□□□□□□□□□□□□□□□□

4.□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□

1.□□□□□□□□□PCB□ICT□FCT□□□□

2.Pogo pin□□□

3.□□BGA□□□□□□□□□□□□□□

4.□□□□□□□□□□□□□QZ□VZ□□LM□□

5.□□□□□□□□□□□□□□□□□

6.□□□□□/□□□

7.□□□□□□□□□□30#OK□□□□□□□POM□□□□□

□□□□□□□□□□□□□□□□□□□

1. Agilent current testing



2. Quadratic element

3.Load Curve Meter

4.Bond Test



5.Life Fatigue Test

6.Microscope

[illegible]

2023 ISO Certificate

Patent for Coaxial Structure

Patent for Honeycomb current probe

[illegible]

[illegible] DHL、UPS、FedEx、TNT、EMS [illegible]

[illegible] Exwork、FOB、CNF、CIF [illegible]

□□□□□

Q1.□□□□□□□□

A1: □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

Q2.□□□□□□□□□

A2: □□□□□□□□□QC□□□□□□□□□□□□□□□□□□□

A5□□□