




SFENG 1984 Pogo Pin ICT



Model	SF-P156
Length	4.75mm (0.1870")
Width	2.75mm (0.1083") 2.80mm (0.1102")
Height	6.30mm (0.2480")
Weight	250mg
Material	Be Cu, Rh Au, Ni
Current	5A
Resistance	50mΩ
Options	R156-VCR, R156-CR R156-VSC, R156-SC
Quantity	100
Notes	7mm




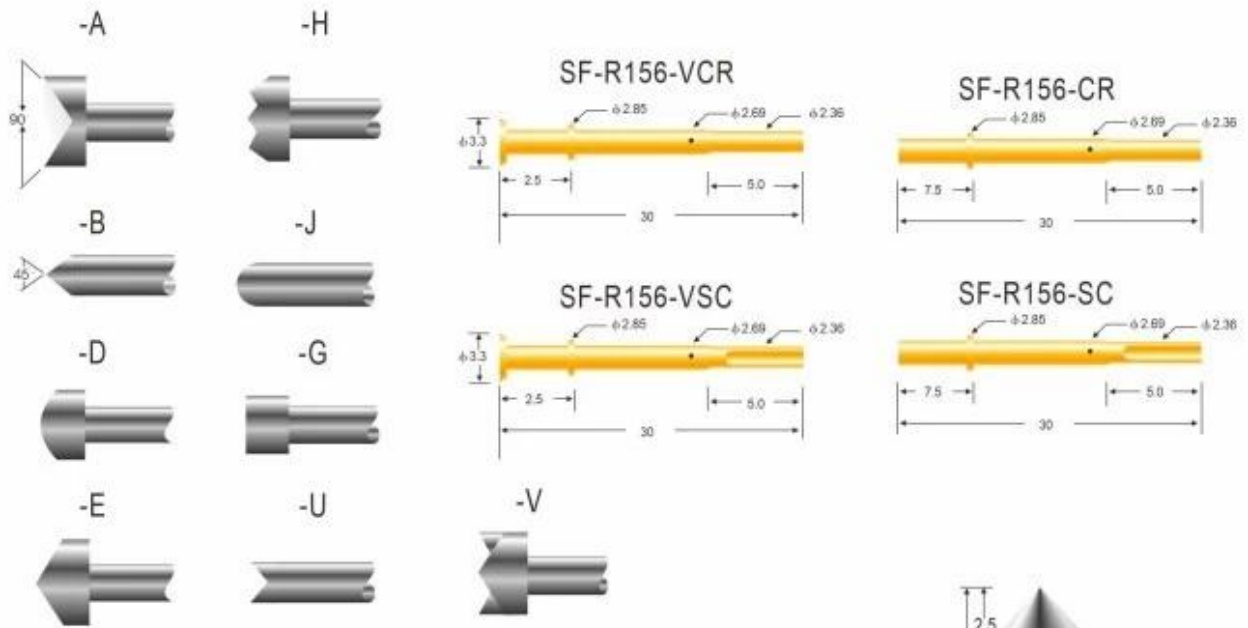

技术规格 PROBE SPECIFICATIONS

Recommended minimum center 最小间距	4.75mm(.1870 ")
Mounting hole size 钻孔尺寸	压克力: 2.75mm(.1083 ") 电木板、玻璃纤维板: 2.80mm(.1102 ")
Full travel 行程	6.30(.2480 ")
Spring force 弹簧压力	250g(克)
Materials and finishes 材料及涂饰	Plunger:SK4, Ni or Au plated BeCu, Ni or Au plated Phosphor bronze, Ni or Au plated Barrel:Brass, Au plated Spring:Stainless steel
Current ration 额定电流	5A(安培)
Contact resistance 接触电阻	50m Ω (毫欧姆)
Connections 接线形式	Crimp: R156-VCR,R156-CR Solder cup: R156-VSC, R156-SC

Receptacle specifications
Materials and finishes: Phosphor bronze,Gold plated

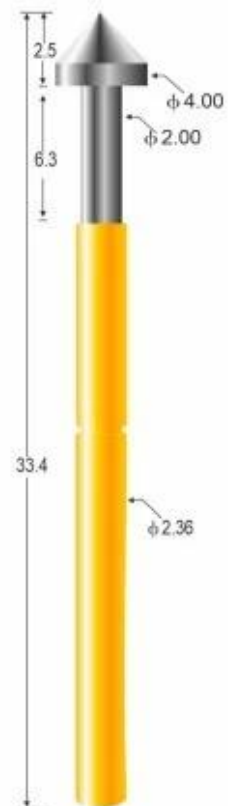

SF-P156-E



1. 24
2. OEM
- 3.
- 4.



1. PCB ICT FCT
2. Pogo pin
3. BGA
4. QZ VZ LM
- 5.
6. /
7. 30# OK POM



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection




5. Finished products




6. Packing






1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope



2023 ISO Certificate



Patent for Coaxial Structure



Patent for Honeycomb current probe



□□□□ DHL □UPS □FedEx □TNT □EMS □□□

□□□□□□□□□□□□□□□□□□□□□□□□ Exwork □FOB □CNF □CIF □□□□□□

A5: [Placeholder]

Q6. [Placeholder]

A6: [Placeholder]

Q7. [Placeholder] **OEM** [Placeholder] **ODM** [Placeholder]

A7: [Placeholder] OEM/ODM [Placeholder]

Q8. [Placeholder]

A8: [Placeholder]