





SFENG 1984 [ict/fct](#)



Model	SF-P111
Resolution	1.90mm, 0.0748"
Pixel Size	1.35mm, 0.0532" 1.40mm, 0.0551"
Field of View	6.3, 2481"
Gain	120
Material	Be Cu, Rh Aluminum Carbon
Current	3A
Power	50W
Temperature	100
Weight	7kg



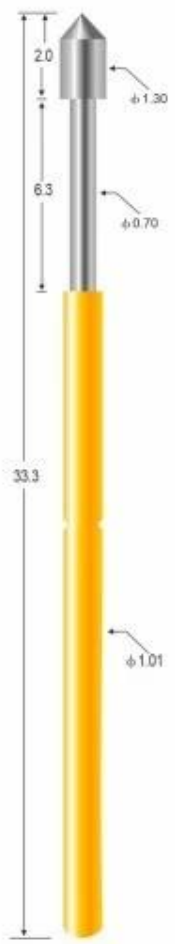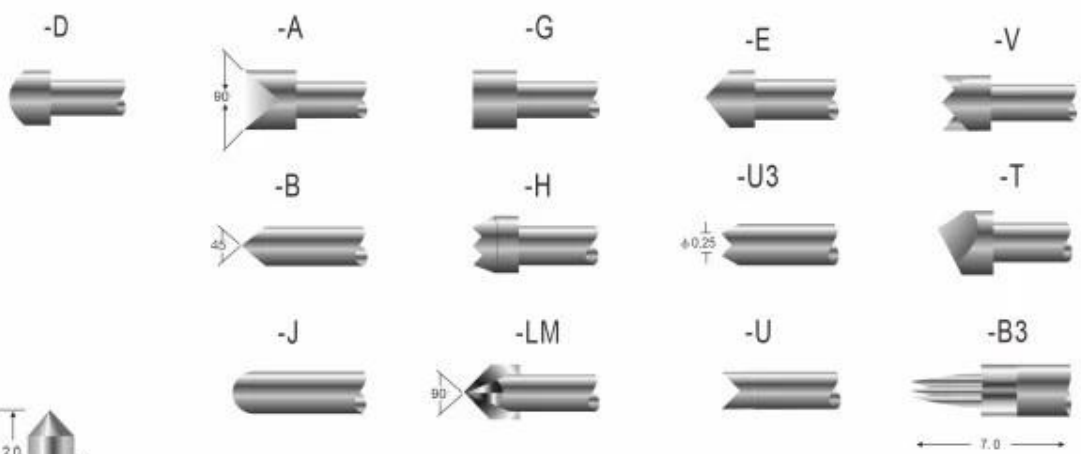

SF-P111-E








技术规格 PROBE SPECIFICATIONS

Recommended minimum center 最小间距	1.90mm(.0748 ")
Mounting hole size 钻孔尺寸	压克力: 1.35mm(.0532 ") 电木板、玻璃纤维板: 1.40mm(.0551 ")
Full travel 行程	6.3(.2481 ")
Spring force 弹簧压力	120g(克)
Materials and finishes 材料及涂饰	Plunger:SK4, Ni or Au plated BeCu, Ni or Au plated Phosphor bronze, Ni or Au plated Barrel:Phosphor bronze, Au plated Spring:Stainless steel
Current ration 额定电流	3A(安培)
Contact resistance 接触电阻	50mΩ(毫欧姆)

Receptacle specifications
Materials and finishes: Phosphor bronze,Gold plated

技术规格 PROBE SPECIFICATIONS

Recommended minimum center 最小间距	1.90mm(.0748 ")
Mounting hole size 钻孔尺寸	压克力: 1.35mm(.0532 ") 电木板、玻璃纤维板: 1.40mm(.0551 ")
Materials and finishes 材料及涂饰	Barrel: Brass, Au plated
Connections 接线形式	Crimp: R111-VCR2.5, R111-CR Solder cup: R111-VSC2.5, R111-SC Wire wrap: R111-VW2.5, R111-WW2.5, R111-WW Terminal:

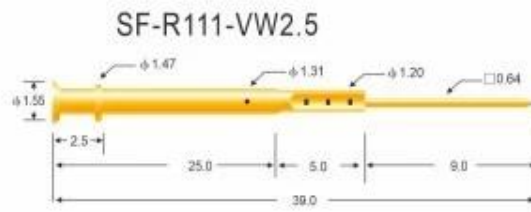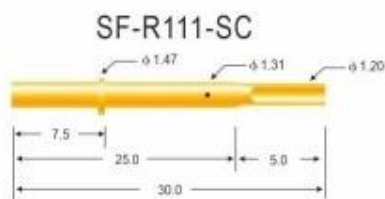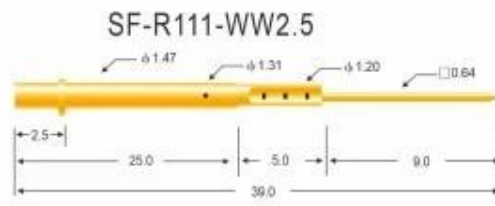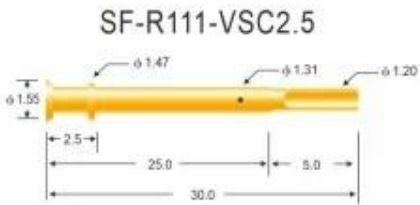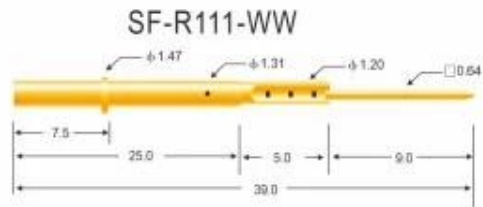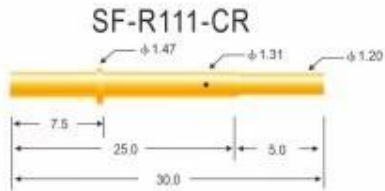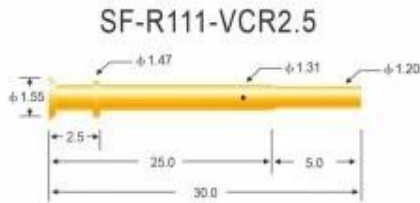

1. 24
2. OEM
- 3.
- 4.



1. PCB/ICT/FCT
2. Pogo pin
3. BGA
4. QZ/VZ/LM
- 5.
- 6.
7. 30#OK/POM



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products



6. Packing





Q1. 〇〇〇〇〇〇〇〇

A1: 〇〇

Q2. 〇〇〇〇〇〇〇〇

A2: 〇〇

Q3. 〇〇〇〇〇〇

A3: 〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇

Q4. 〇〇〇〇〇〇

A4: 〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇

Q5. 〇〇〇〇〇〇〇〇〇〇〇〇

A5: [Placeholder]

Q6. [Placeholder]

A6: [Placeholder]

Q7. [Placeholder] **OEM** [Placeholder] **ODM** [Placeholder]

A7: [Placeholder] OEM/ODM [Placeholder]

Q8. [Placeholder]

A8: [Placeholder]