





SFENG 1984 PCB

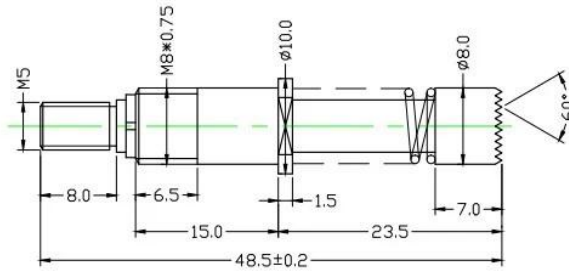

品名	SF-PH800*4850
规格	8.0
长度	5.0
重量	1500±20%gf@5.0mm
材料	针套 针轴 SU304
额定电流	20A
接触电阻	≤0.5mΩ
行程	100
弹力	7



Materials(Plated) (材質與鍍層) :
 Barrel(針套) : Brass(黃銅) , Ni Plated
 Plunger(針軸) : BeCu(鈹銅) , Au on Ni Plated
 Spring(彈弓) : SUS304 (不銹鋼線) , /

Specifications (技術要求) :
 Current Rating(額定電流) : 20A
 Contact Resistance(接觸電阻) : ≤0.5mΩ
 Full Stroke(滿沖程) : 8.0mm
 Rated Stroke(額定沖程) : 5.0mm
 Spring Force(額定彈力) : 1500±20%gf@ load 5.0mm

				名称: SF-PH800X4850-H8.0(M)				胜峰科技			
								说明: 1. 所有尺寸单位为mm 2. 未注图示尺寸公差: 按GB1804-T9 11级精度执行			
设计	处数	更改文件号	签	字	日期	图样标记	视图	质量	比例	图纸编号:	
校对			标准	定		S	A	⊕	/		
审核			制	图	HJQ						
工艺			日	期	2022-5-20	共	1	页	第	1	页



1. 24
2. OEM
- 3.
- 4.



1. PCB ICT FCT
2. Pogo pin
3. BGA
4. QZ VZ LM
- 5.
6. /
7. 30# OK POM



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop




4. Quality inspection




5. Finished products



6. Packing



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope



2023 ISO Certificate



Patent for Coaxial Structure



Patent for Honeycomb current probe



□□□□ DHL □ UPS □ FedEx □ TNT □ EMS □□□

Exwork FOB CNF CIF



Q1.

A1:

Q2.

A2:

Q3.

A3:

Q4.

A4:

