


0000

0000	SF5067
0000	3A
0000	≤50mΩ
000	100g±20g
0000	1.0mm
00	Ph,∥Ni∥00
0	000“00”
00	000“00”
00	000
00∥00	OEM & ODM
00000	100PCS
00	000000
00	100% T/T∥000
0000	00000 5-10 0

00 00

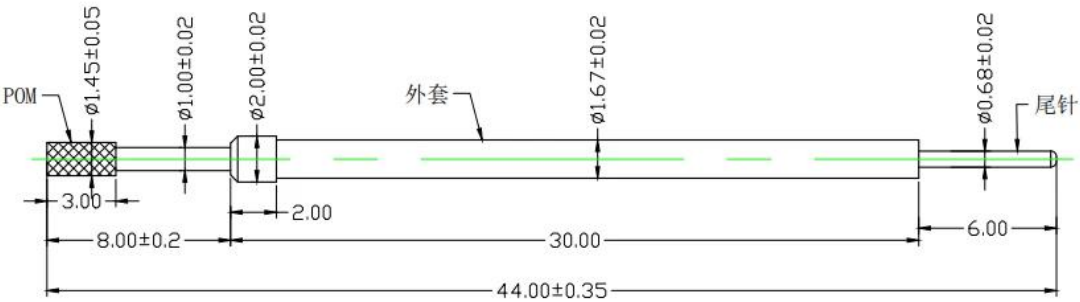

材质与弹力:

- 1. 外套: 黄铜镀金
- 2. 针头: 磷铜镀金
- 3. 尾针: 黄铜镀金
- 4. 弹簧: 不锈钢线

技术要求:

- 1. 额定电流: 3A
- 2. 额定电阻: $\leq 50\text{m}\Omega$
- 3. 开关距离: 1.0mm
- 4. 开关弹力: $100\text{g} \pm 20\text{g}$

00 00



1. raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection




5. Finished products



6. Packing



Measuring Equipment >



Measuring Equipment:

1. Agilent current testing;
2. Quadratic element measurement
3. Load Curve Meter
4. Bond Test
5. Life Fatigue Test





1. PCB ICT FCT
2. Pogopin
3. BGA
4. LM QZ VZ
- 5.
6. Terminal&receptacle/socket;
- 7.

1. 24
2. OEM
- 3.
- 4.