


□□□□

□□□□	SF3763
□□	□□4.0*42.0mm
□□	□□□□□□□□ □□□□□□□□ □□□□□□
□□□	10.0□□
□□ □□	6.5□□
□□□	200±35gf@□□ 6.5mm
□□□	100PCS
□□	□□
□□□□	5-15 □ □□ □□□

□□ □□

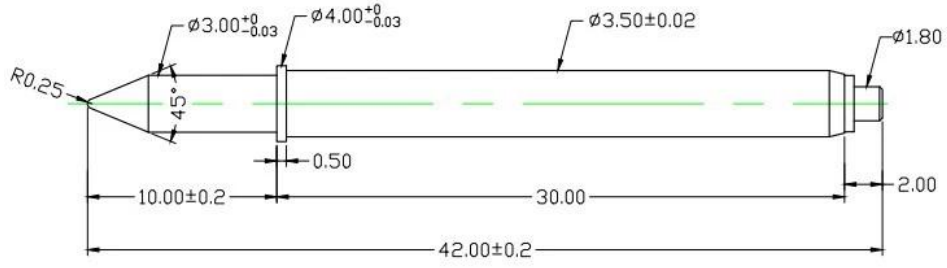

Materials(Plated) (材質與鍍層) :  
 Barrel(針套) : Brass(黃銅) , Ni Plated  
 Plunger(針軸) : Brass(黃銅) , Ni Plated  
 Spring(彈弓) : SUS (不銹鋼線) , /

Specifications (技術要求) :  
 Full Stroke(滿沖程) : 10.0mm  
 Rated Stroke(額定沖程) : 6.50mm  
 Spring Force(額定彈力) : 200±35gf@ load 6.50mm

					名称:				胜峰探针	
					SF-GP3. 5X42-B(R0. 25)					
					说明:				图纸编号:	
					1. 所有尺寸单位为mm					
					2. 未注图示尺寸公差:按GB1804-79 11级精度执行					
标记	处数	更改文件号	签字	日期	图样标记	视图	质量	比例		
设计			标准化		S	A		1:1		
校对			审定							
审核			制图	HJQ						
工艺			日期	2017-12-12	共	1	页	第	1	页





1. raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection




5. Finished products



6. Packing



## Measuring Equipment >



### Measuring Equipment:

1. Agilent current testing;
2. Quadratic element measurement
3. Load Curve Meter
4. Bond Test
5. Life Fatigue Test

□□



□□□ □□

1. □□ □□ □□□□□□□□ □□□□□□□□ □□
2. Pogo pin □□□□□□□□ □□□□□□□□ □□□□ □□□□□□□□□□□□□□ □□□□
3. □□“BGA”□□□□□□□□□□□□□□
4. □□□□□□□□□□□□ □□□□□□□□□□□□
5. □□□□□□□□□□□□□□□□
6. □□&□□/□□□□
7. □□□□□□□□□□□□□□□□ □□□□□□

□□□ □□

1. □□□□□□“24”□□□□□□□□□□□□
2. □□□□□□□□□□□□□□□□□□□□ □□□□□□
3. □□□□□□□□□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□
4. □□□□□□□□□□□□□□□□□□□□□□□□□□□□