


□□□□

□□□□	SF7145
□□□	3.5□□
□□□□	2.0□□
□□□	2000±20%
□□□□	0.5±0.2□□
□□	□□□ Ni
□	□□□□□
□□	□□□□□
□□ □□	OEM &ODM
□□□	100PCS
□□	□□□□□□
□□	100% T/T □□□
□□□□	5-10 □ □□ □□□

□□ □□

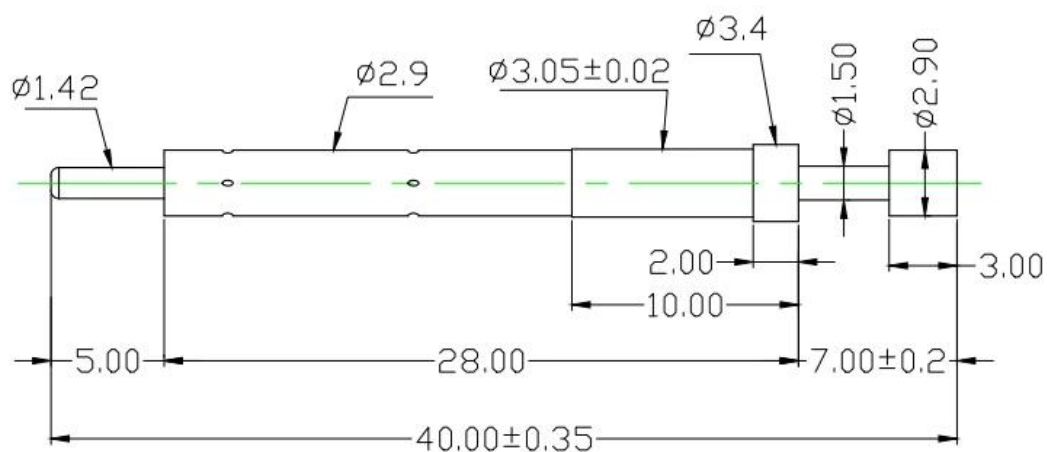

材质与电镀:

1. 针头: 易车铁镀镍
2. 针套: 黄铜镀镍
3. 尾针: 黄铜镀金

技术要求:

- 满行程: 3.5mm
额定行程: 2.0mm
额定弹力: 2000±20%g
开关距离: 0.5±0.2mm



Production Flow (生产流程)



1. raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection




5. Finished products



6. Packing



Measuring Equipment >



Measuring Equipment:

1. Agilent current testing;
2. Quadratic element measurement
3. Load Curve Meter
4. Bond Test
5. Life Fatigue Test

