


□□□□

□□	SFENG
□□□□	SF-P156
□□	□□
□□	□□
□□	SUS□□□□
□□	250□
□□□□	6.30□0.2480"□
□□	5A
□□	50mW
□□□□	4.75□0.1870"□
□□□□□	2.75□0.1083"□/ 2.80□0.1102"□
MOQ	100 □
□□□□	□□□□□□7□□□□□

□□□□

SF-R156

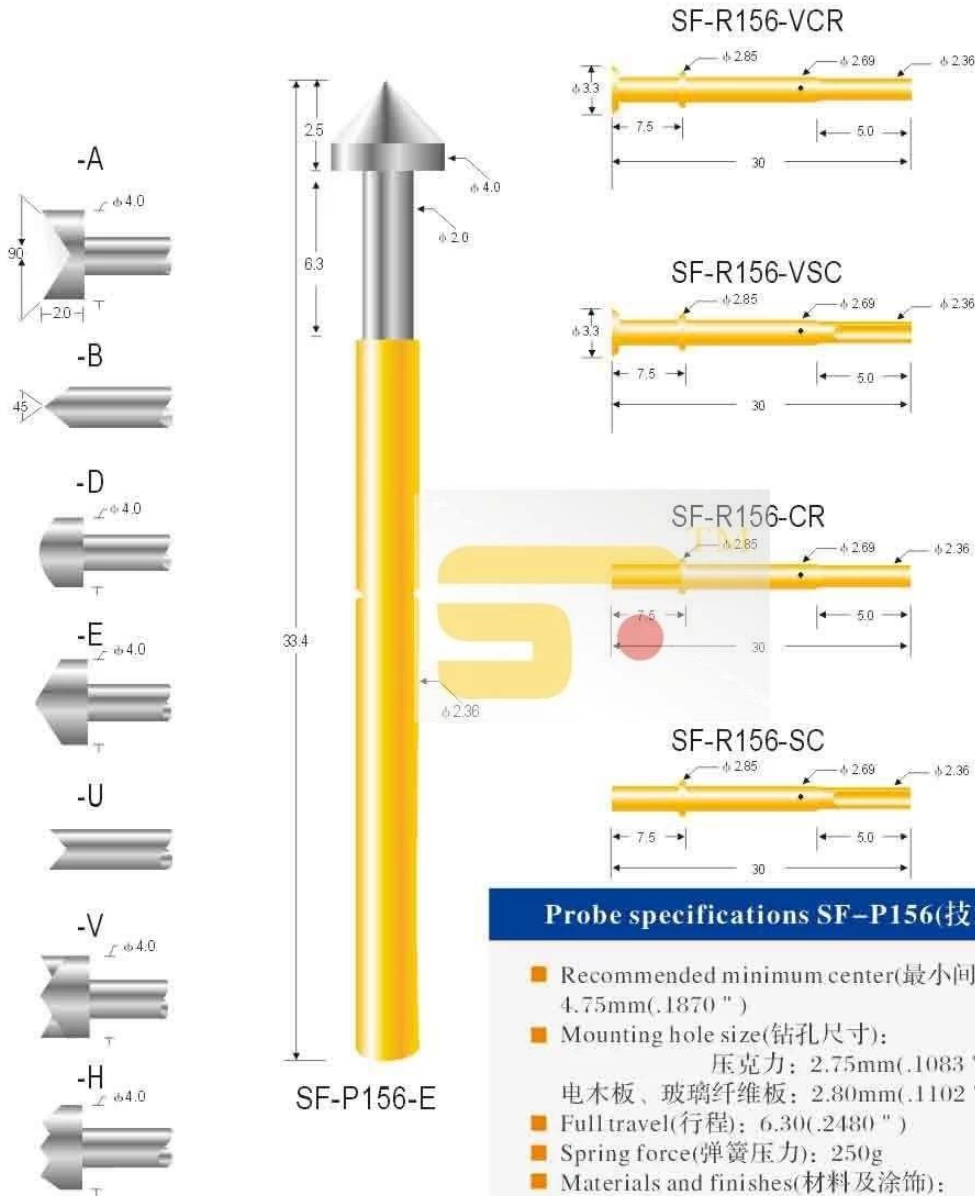

Probe specifications SF-P156(技术规格)

- Recommended minimum center(最小间距): 4.75mm(.1870")
- Mounting hole size(钻孔尺寸):
压克力: 2.75mm(.1083")
电木板、玻璃纤维板: 2.80mm(.1102")
- Full travel(行程): 6.30(.2480")
- Spring force(弹簧压力): 250g
- Materials and finishes(材料及涂饰):
Plunger: Be Cu, Rh plated;
Barrel: Brass, Gold plated
Spring: Stainless steel
- Current rating(额定电流): 5A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)
- Connections(接线形式):
Crimp: R156-VCR, R156-CR
Solder cup: R156-VSC, R156-SC

www.shengfengdz.com



□□□□□

1. □□□□□□□□ 24□□□□□□□□□□

2. 提供 OEM 服务

3. 提供 100% 质量保证

4. 提供 24 小时技术支持

服务

提供 PCB、ICT、FCT 服务；

提供 100% 质量保证；

提供 BGA 服务；







提供 LM、QZ、VZ 服务；

提供 24 小时技术支持；

提供 30 天质保；

提供 30 天 OK 服务 POM 服务

服务

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

□□□□

