


□□□□□□□□□□

□□

□□ □□	□□□□□□□□□□
□□□□□	□□□□□□□□□□; □□□□□□□□□□; □□□□□□□□□□;
□□	□□;
□ □□	3-10 □
□□	DHL / TNT / UPS / FEDEX



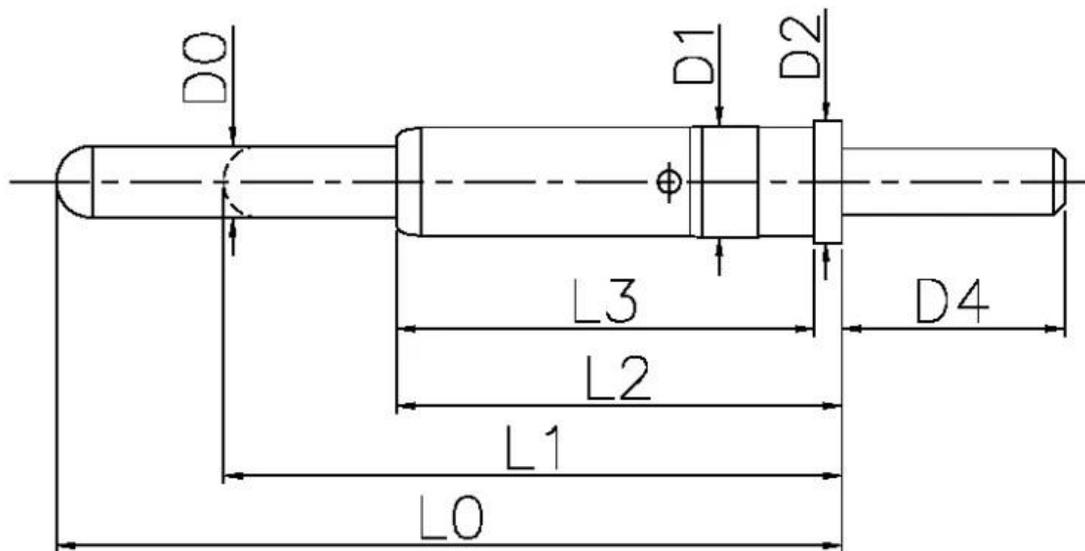

P/N	Total Length (L0)	Working Height (L1)	Spring Force $\pm 20\%$	Barrel Length (L2)	Length (L3)	Plunger Diameter (D0)	Barrel Diameter (D1)	Bottom Diameter (D2)	Tail length (D4)
N050M0	4.75	3.95	90.00	3.50	2.80	0.80	1.25	2.00	0.40
N059M0	8.10	5.80	100.00	5.80	3.00	0.80	1.60	2.80	2.30
N027M9	8.70	7.70	110.00	7.50	5.80	1.00	1.51	1.80	0.60
N029M3	10.90	9.50	110.00	11.20	8.20	1.00	1.51	1.80	2.50
N003M0	11.40	10.40	100.00	6.30	5.50	0.90	1.60	1.90	2.40
N029M2	13.70	12.50	110.00	11.00	10.50	1.00	1.51	1.80	2.50
N021X0	14.10	11.10	130.00	8.00	7.50	1.30	2.01	2.20	4.00
N021X5	14.10	11.10	200.00	8.00	7.50	1.30	2.01	2.20	4.00
N029M1	15.50	13.50	130.00	11.00	10.50	1.00	1.51	1.80	2.50
N029M0	17.20	16.20	100.00	15.70	13.20	1.00	1.51	1.80	2.50
N089M0	5.50	4.50	110.00	4.00	4.00	1.00	2.00	1.51	1.40
N130M1	7.10	6.40	50.00	6.10	4.30	0.80	1.20	1.30	0.80
N153M0	7.20	5.70	80.00	8.05	4.90	0.90	1.50	1.50	3.15
H255M1	7.40	5.90	40-60	5.80	5.40	0.90	1.51	2.00	2.00
N130M0	7.65	6.95	35.00	6.00	4.45	0.50	0.90	1.00	0.55
N059M1	8.10	5.80	100.00	5.80	3.00	0.80	1.60	2.80	1.30
N059M5	8.25	6.75	65.00	5.95	2.90	0.76	1.70	2.80	2.55
N059M2	8.50	6.20	100.00	6.20	3.20	0.80	1.60	2.80	1.50
N065M0	9.20	7.93	240.00	7.10	4.90	1.05	1.93	2.40	1.20
N059M3	9.30	8.30	100.00	7.00	3.70	0.80	1.60	2.80	2.80
N164M0	4.50	3.50	110.00	3.25	2.45	0.90	1.50	1.90	6.00
N181M2	4.80	4.00	110.00	4.10	2.40	1.03	1.50	2.10	0.80
N160M0	5.50	4.10	140.00	4.00	4.00	0.90	1.50	1.50	2.00
N181M6	6.40	5.50	100.00	5.00	4.50	1.00	1.51	2.00	0.80
N181M8	6.70	5.80	100.00	6.10	4.80	1.00	1.50	2.00	0.80
N181M0	7.20	6.20	110.00	6.00	4.60	1.00	1.48	1.80	0.60
N181M4	8.70	7.70	110.00	7.50	6.20	1.00	1.48	2.00	0.80
N157M0	10.30	8.50	60.00	8.30	6.30	1.70	2.60	2.60	2.00
N153M2	10.70	9.70	80.00	9.20	3.70	0.90	1.52	1.52	5.50

SFENG 有限公司

本公司所有產品均符合 ISO9001-2008 及 RoHS 標準

000000

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

□□

