


□□□□

□□□□	SF-P125-J
□□	1.90□□
□□ □ □□	□□□□1.35 □□□□1.40mm
□□□	4.5□□
□□□	180±20%gf@□□4.5mm
□□□□	3A
□□ □□	≤50mΩ
□□□	100PCS
□□	□□
□□□□	5-10 □ □□ □□□


□□ □□

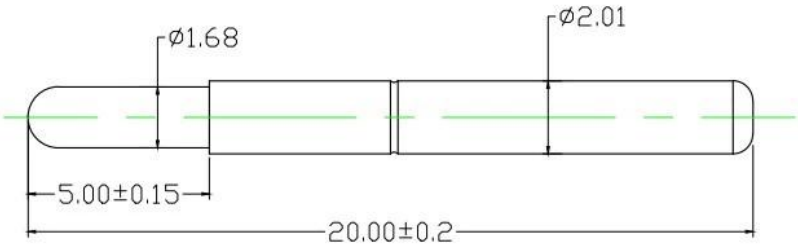

Materials(Plated) (材質與鍍層) :
Barrel(針套) : Brass(黃銅) , Au on Ni Plated
Plunger(針軸) : Brass(黃銅) , Ni Plated
Spring(彈弓) : SUS (不銹鋼線) , /




Specifications (技術要求) :
Full Stroke(滿行程) : 4.5mm
Spring Force(彈力) : 180±20%gf@ load 4.5mm

						名 称:				胜峰科技	
						SF-P125-J(L20)					
										说明:	
标记	处数	更改文件号	签	字	日 期					1. 所有尺寸单位为mm	
设 计			标	准	化	图 样 标 记	视 图	质 量	比 例	2. 未注图示尺寸公差:按GB1804-79 11级精度执行	
校 对			审	定		S	A			1:1	图纸编号:
审 核			制	图	RSS						
工 艺			日 期	2020-09-24		共	1	页	第	1	

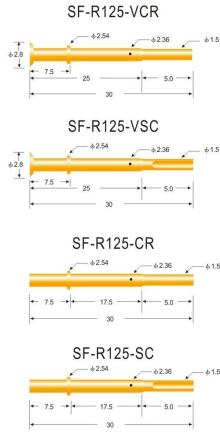



Probe specifications SF-P125(技术规格)

- Recommended minimum center(最小间距): 3.17mm(.1248")
- Mounting hole size(钻孔尺寸): 压克力: 2.40mm(.0945")
电木板、玻璃纤维板: 2.45mm(.0965")
- Full travel(行程): 6.30(.2480")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰):
Plunger: Be Cu, Rh plated;
Barrel: Brass, Gold plated
Spring: Stainless steel
- Current rating(额定电流): 5A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)
- Connections(接线形式):
Crimp: R125-VCR, R125-CR
Solder cup: R125-VSC, R125-SC

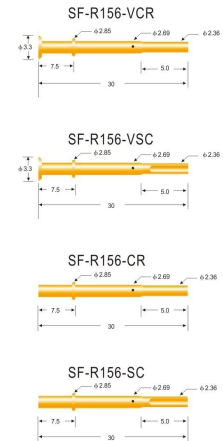

Probe specifications SF-P156(技术规格)

- Recommended minimum center(最小间距): 4.75mm(.1870")
- Mounting hole size(钻孔尺寸): 压克力: 2.75mm(.1083")
电木板、玻璃纤维板: 2.80mm(.1102")
- Full travel(行程): 6.30(.2480")
- Spring force(弹簧压力): 250g
- Materials and finishes(材料及涂饰):
Plunger: Be Cu, Rh plated;
Barrel: Brass, Gold plated
Spring: Stainless steel
- Current rating(额定电流): 5A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)
- Connections(接线形式):
Crimp: R156-VCR, R156-CR
Solder cup: R156-VSC, R156-SC







1. raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection




5. Finished products



6. Packing



Measuring Equipment >



Measuring Equipment:

1. Agilent current testing;
2. Quadratic element measurement
3. Load Curve Meter
4. Bond Test
5. Life Fatigue Test



