





SFENG 1984 PCB



Model	SF-P160
Dimensions	254 x 1000 mm
Weight	170 kg / 0670 lbs 175 kg / 0689 lbs
Capacity	4 x 1575 mm
Speed	200 mm/min
Material	SK4 0.5 mm 0.5 mm
Power	3 A
Current	50 A
Voltage	100 V
Frequency	70 Hz






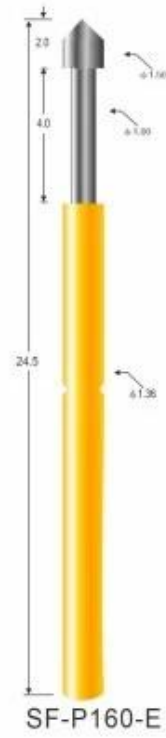
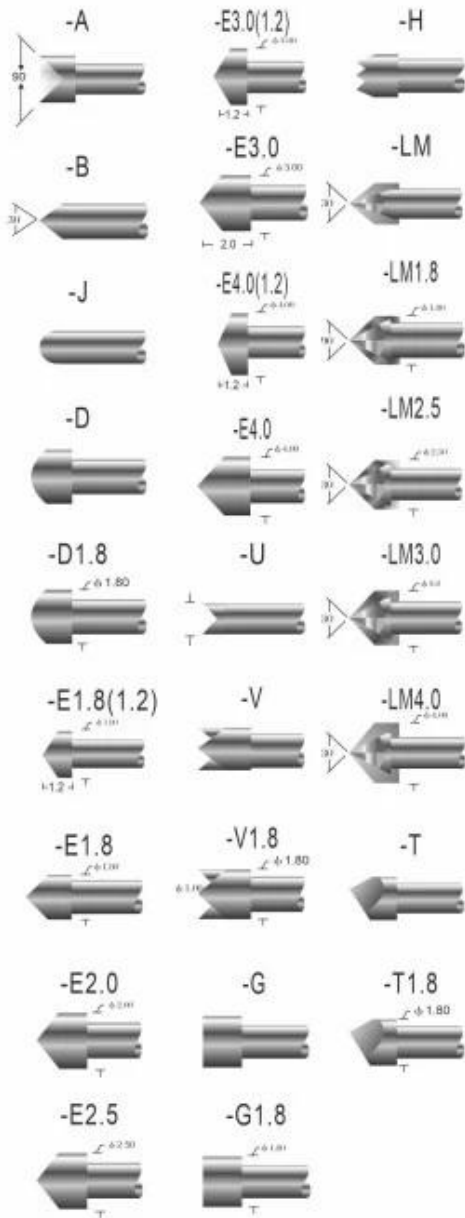


SF-P160-E

技术规格 PROBE SPECIFICATIONS

Recommended minimum center 最小间距	2.54mm(.1000 ")
Mounting hole size 钻孔尺寸	冲击力: 1.70mm(.0670 ") 电木板、玻璃纤维板: 1.75mm(.0689 ")
Full travel 行程	4.0(.1575 ")
Spring force 弹簧压力	200g(克)
Materials and finishes 材料及涂饰	Plunger:BeCu, Ni or Au plated Phosphor bronze, Ni or Au plated Barrel:Phosphor bronze, Au plated Spring:Stainless steel
Current ration 额定电流	3A(安培)
Contact resistance 接触电阻	50m Ω (毫欧姆)

Receptacle specifications
Materials and finishes: Phosphor bronze,Gold plated

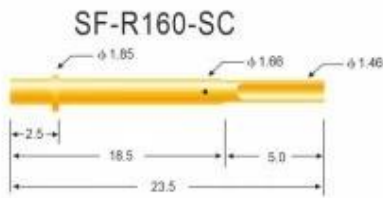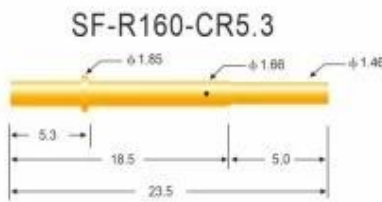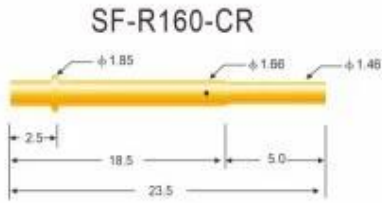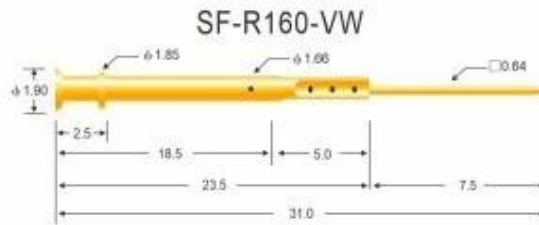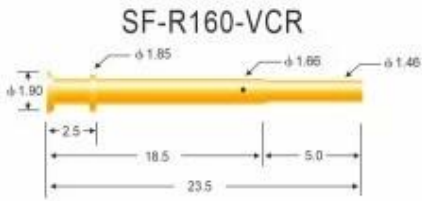

技术规格 PROBE SPECIFICATIONS

Recommended minimum center 最小间距	2.54mm(.1000 ")
Mounting hole size 钻孔尺寸	压克力: 1.70mm(.0670 ") 电木板、玻璃纤维板: 1.75mm(.0689 ")
Materials and finishes 材料及涂饰	Barrel: Brass, Au plated
Connections 接线形式	Crimp: R160-VCR, R160-CR, R160-CR5.3 Solder cup: R160-VSC, R160-SC, R160-SC5.3 Wire wrap: R160-VW, R160-WW, R160-WW5.3

Receptacle specifications
Materials and finishes: Phosphor bronze, Gold plated



1 24

2 OEM

3

4



1. PCB/ICT/FCT

2. Pogo pin

3. BGA

4. QZ/VZ/LM

5.

6. /

7. 30#OK/POM



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products



6. Packing





Q1. □□□□□□□□

A1: □□□□□□□□□□□□□□□□□□□□□□□□

Q2. □□□□□□□□

A2: □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

Q3. □□□□□□

A3: □□□□□□□□□□□□□□□□□□□□□□

Q4. □□□□□□

A4: □□□□□□□□□□□□□□□□□□□□□□□□□□□□

Q5. □□□□□□□□□□□□

A5: [Placeholder]

Q6. [Placeholder]

A6: [Placeholder]

Q7. [Placeholder] **OEM** [Placeholder] **ODM** [Placeholder]

A7: [Placeholder] OEM/ODM [Placeholder]

Q8. [Placeholder]

A8: [Placeholder]