



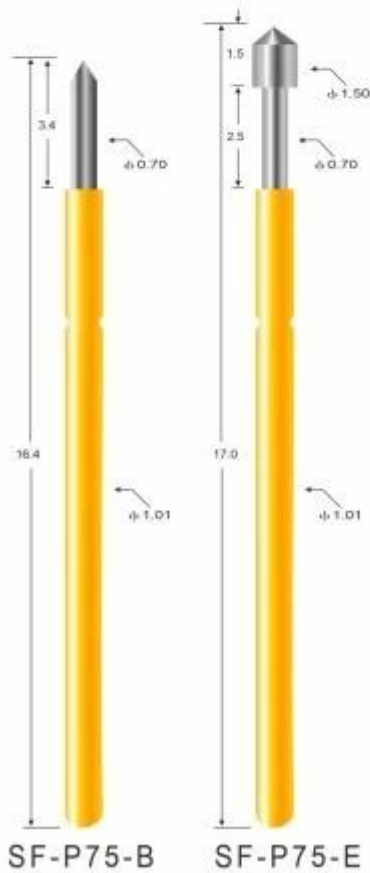

SFENG 1984 ( )

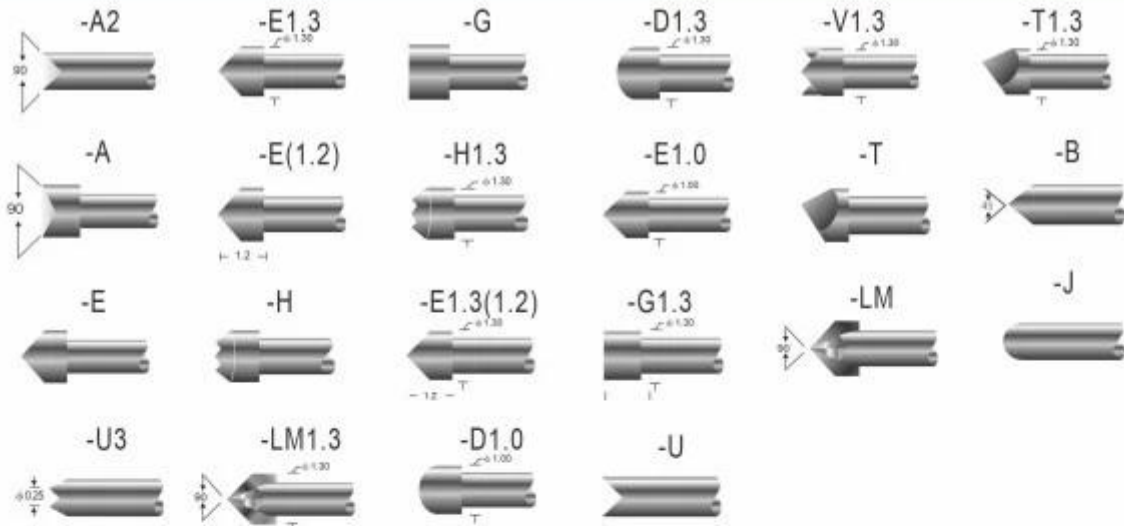

### 技术规格 PROBE SPECIFICATIONS

Recommended minimum center 最小间距	1.90mm(.0748 ")
Mounting hole size 钻孔尺寸	压克力: 1.35mm(.0532 ") 电木板、玻璃纤维板: 1.40mm(.0551 ")
Full travel 行程	3.4(.1338 ") / 2.50(.0984 ")
Spring force 弹簧压力	120g(克)
Materials and finishes 材料及涂饰	Plunger: SK4, Ni or Au plated BeCu, Ni or Au plated Barrel: Phosphor bronze, Au plated Spring: Stainless steel
Current rating 额定电流	3A(安培)
Contact resistance 接触电阻	50mΩ(毫欧姆)

Receptacle specifications  
Materials and finishes: Phosphor bronze, Gold plated



項目	SF-P75
寸法	190mm×.0748"
厚さ	1.35mm×.0532" 1.40mm×.0551"
重量	3.40g/1.338g/2.50g/0.984g
材質	100%
表面処理	Be Cu, SK4, 無 処理
公差	3A
ロット	50
検査	100%
備考	7000

### 注意事項

1. 24時間以内にお届けいたします
2. OEM対応
3. 品質保証書をお付けいたします
4. 送料は別途お見積りいたします

### お問い合わせ

1. PCB・ICT・FCT
2. Pogo pin
3. BGA
4. QZ・VZ・LM
5. 各種加工
6. 各種材料
7. 30#OK POM

お問い合わせ先

### お問い合わせ



□□□□



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop




4. Quality inspection



5. Finished products



6. Packing



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope



Q1. 請說明

A1: 請說明

Q2. 請說明

A2: 請說明QC

Q3. 請說明

A3: 請說明

Q4. 請說明

A4: 請說明

Q5. 請說明

A5: 請說明m

Q6. 請說明

A6: 請說明

Q7. 請說明 OEM 與 ODM 的區別

A7: 請說明 OEM /ODM 的區別 . P 的區別 or 的區別

Q8. 請說明

A8: 請說明 , 的區別



請說明 DHL、UPS、FedEx、TNT、EMS 的區別

請說明 Exwork、FOB、CNF、CIF 的區別





2023 ISO Certificate



Patent for Coaxial Structure



Patent for Honeycomb current probe











□□□□□





CIBF 2021

苏州胜亿福睿电子科技有限公司  
Suzhou Shengyifurui Electronic Technology Co., Ltd

No.3B013

