

□□□□

□□	SFENG
□□□□	SF-P030-A
□□	□□□□□□□□□□
□	□□□□□□□□
□□□	SK4□□□□□
□□□	60□
□□□□	2.0□□
□□□□□	1A
□□□□	150mΩ
□□	0.9□□
□□□□□	0.65□□
□□□□□	100□
□□□□	□□□□□7□□□□□□

□□□□

胜峰探针  
**SFENG**  
The China's The World's

RoHS

QUALITY ASSURED FIRM  
ISO 9001  
SGS

CE


chinapogopinsupplier.com

## Probe specifications SF-P030 PL030(技术规格)

- Recommended minimum center(最小间距): 0.90mm(.0354 ")
- Mounting hole size(钻孔尺寸): 0.65mm(.0256 ")
- Full travel(行程): 2.0(.0787 ")
- Spring force(弹簧压力): 60g(克)
- Materials and finishes(材料及涂饰):  
 Plunger:SK4,Rh plated  
 Barrel:Phosphor bronze,Gold plated  
 Spring:Music wire,Gold plated
- Current ration(额定电流): 1A(安培)
- Contact resistance(接触电阻): 150mΩ(毫欧姆)

### Receptacle specifications

Materials and finishes: Phosphor bronze,  
Gold plated

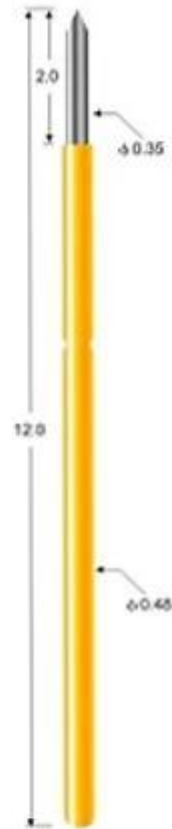

SF-P030-B

□□□□□

- 1.Reply□□□□withn 24□□□□□
- 2.Customized□□□□□□□□OEM□□
- 3.Delivery□□□□□□□□□□□□□□□□
- 4.□□□□□□□□□□□□□□□□□□□□

□□□□

- PCB□ICT□FCT□□□;
- usuallytemporary□□□
- ;

interconnectApplications;

--□□probef orBGA□□□□; semiconudtion□□;







--□□□□□□□□coatingpin□LM□withQZ□□□□□; VZseries;

--□□□□□□□□□□□□□□□□...

--□□□□□□□;□□/□□;

--□□□□□□□□□□□□30□OKwire□□□□□□POM□Ironhinge□

□□□□

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

□□□□

