

□□□□

□□	SFENG
□□□□	SF-P50
□□	□□
□	□□
□□□	SUS□□□□
□□□	□□
□□□□	2.5□0.0984"□
□□□□□	1.5A
□□□□	50□□W ⁻
□□	1.27□0.0500"0
□□□□□	0.90□0.0354"□/ 0.95□0.0374"□
□□□□□	100□
□□□□	□□□□□7□□□□□

□□□□

胜峰探针
SFENG
The China's The World's



RoHS

QUALITY ASSURED FIRM
ISO 9001
SGS

CE

chinapogopinsupplier.com

SF-P50

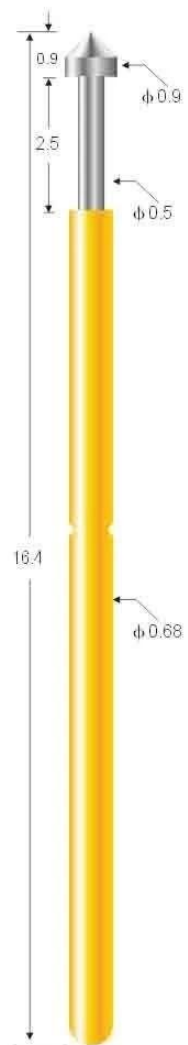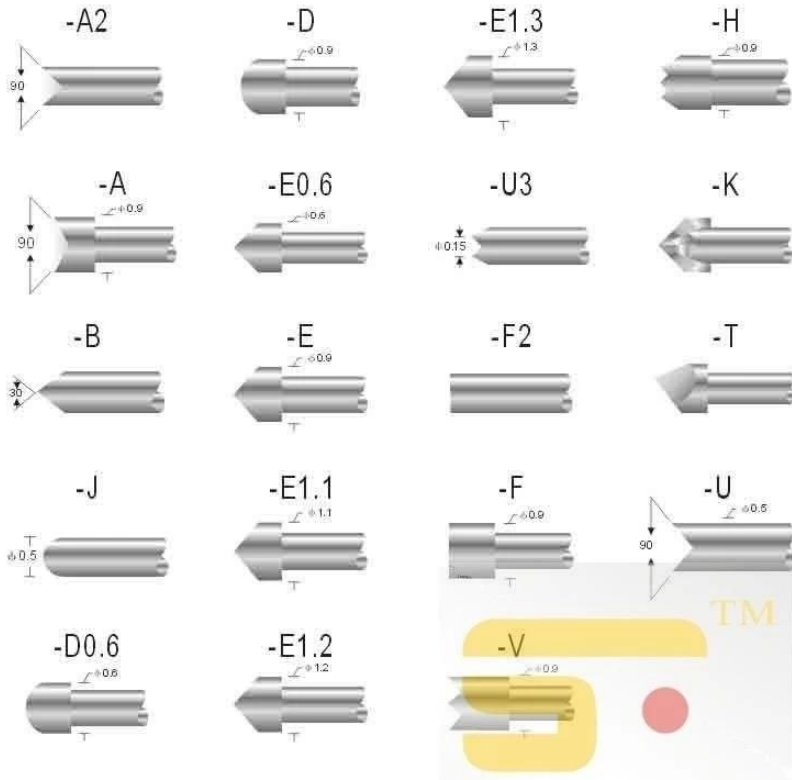

SF-P50-E

Probe specifications SF-P50(技术规格)

- Recommended minimum center(最小间距): 1.27mm(.0500 ")
- Mounting hole size(钻孔尺寸):
V: 0.90mm(.0354 ")
W: 0.95mm(.0374 ")
- Full travel(行程): 2.5(.0984 ")
- Spring force(弹簧压力): 100g
- Materials and finishes(材料及涂饰):
Plunger: Be Cu, Rh plated; SK4, Rh plated
Barrel: Phosphor bronze, Gold plated
Spring: Stainless steel
- Current ration(额定电流): 1.5A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)

www.shengfengdz.com

□□□□□

1. □□□□□24□□□□□□□□□□

2. □□□□□□□□□□OEM□□□□

3. 00000000000000000000000000000000

4. 00000000000000000000000000000000

0000

0000000000PCB|CT|FCT000;

00000000000000000000000000000000;0000;

00000BGA000000;







000000000000LM00QZ0VZ00;

000000000000000;

000000;00/00;

0000000000030OK0000000POM000000

0000

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

□□□□

