


□□□□

□□	SFENG
□□□□	SF-P11
□□	□□
□□	□□
□□	SUS□□□□
□□	150□
□□□□	4.0□0.1575"□
□□	3A
□□	50mW
□□□□	1.90□0.0748"□
□□□□□	1.35□0.532"□/ 1.40□0.0551"□
MOQ	100 □
□□□□	□□□□7□□□□

□□□□

SF-P11

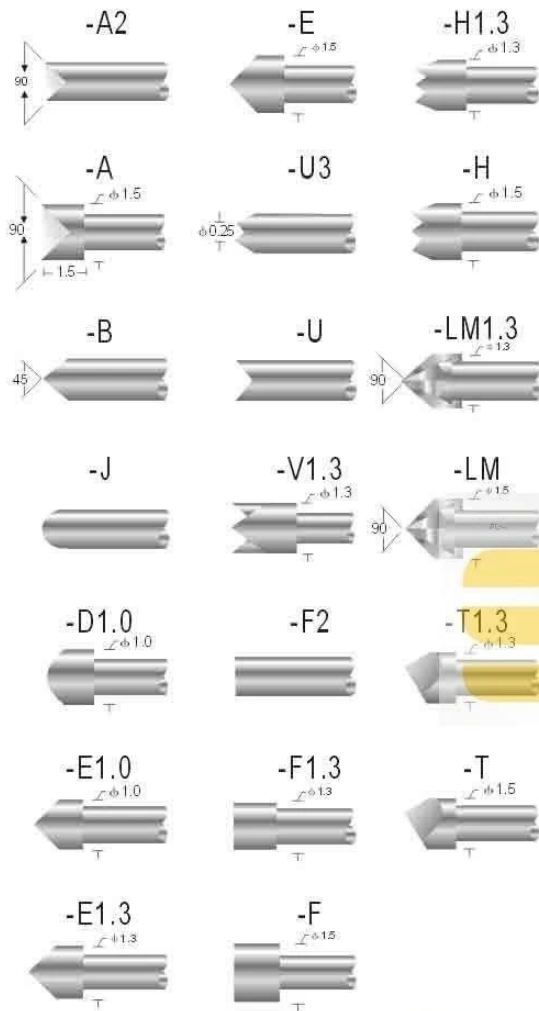

Probe specifications SF-P11(技术规格)

- Recommended minimum center(最小间距): 1.90mm(.0748")
- Mounting hole size(钻孔尺寸):
 压克力: 1.35mm(.0532")
 电木板、玻璃纤维板: 1.40mm(.0551")
- Full travel(行程): 4.0(.1575")
- Spring force(弹簧压力): 150g
- Materials and finishes(材料及涂饰):
 Plunger: Be Cu, Rh plated
 Barrel: Brass, Gold plated
 Spring: Stainless steel
- Current ration(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)

www.shengfengdz.com



chinapogopinsupplier.com

公司简介

1. 专业生产 24 针探针
2. 承接 OEM 订单
3. 产品广泛应用于 PCB、ICT、FCT 等领域
4. 产品规格齐全，交货迅速

产品应用

广泛应用于 PCB、ICT、FCT 领域；
广泛应用于 PCB、ICT、FCT 领域；
广泛应用于 BGA 封装领域；







□□□□□□□□□□LM□□QZ□VZ□□;

□□□□□□□□□□□□□□;

□□□□□;□□/□□;

□□□□□□□□□□30□OK□□□□□□□□POM□□□□□□

□□□□

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

□□□□

