



**made in China standard size fine pitch spring probes center pitch 0.45mm**


**Test probe(mm)**

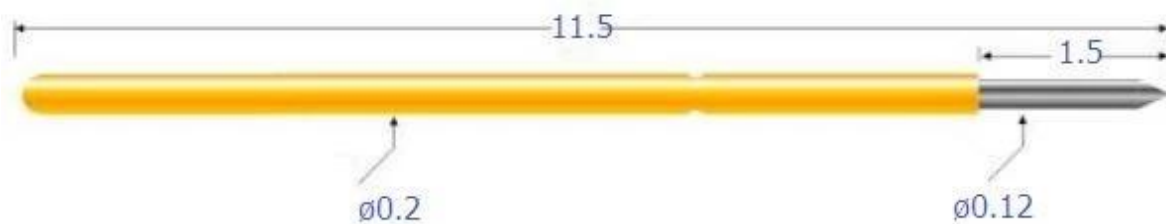

**Receptacle(mm)**

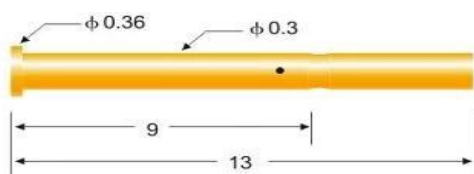

**SF-R080-VR**

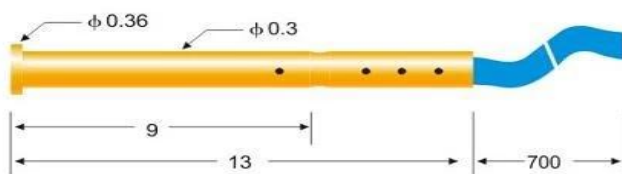

**SF-R080-VRW**

| Mechanical Specification         |       |
|----------------------------------|-------|
| Full travel:                     | 1.5mm |
| Recommended Travel:              | 1.0mm |
| Spring Force@Recommended Travel: | 15g   |

### Materials and Plating

|            |  |
|------------|--|
| Plunger    | brass or Becu,gold plated on Nickel plated |
| Barrel     | brass,gold plated on Nickel plated         |
| Spring     | steel or music wire,Nickel plated          |
| Receptacle | brass,gold plated on Nickel plated         |

Electrical specification

|                |              |
|----------------|--------------|
| Current rating | 0.3A         |
| Resistance     | 260 $\Omega$ |